


Model Number:
AJO36BXS4CH/AA

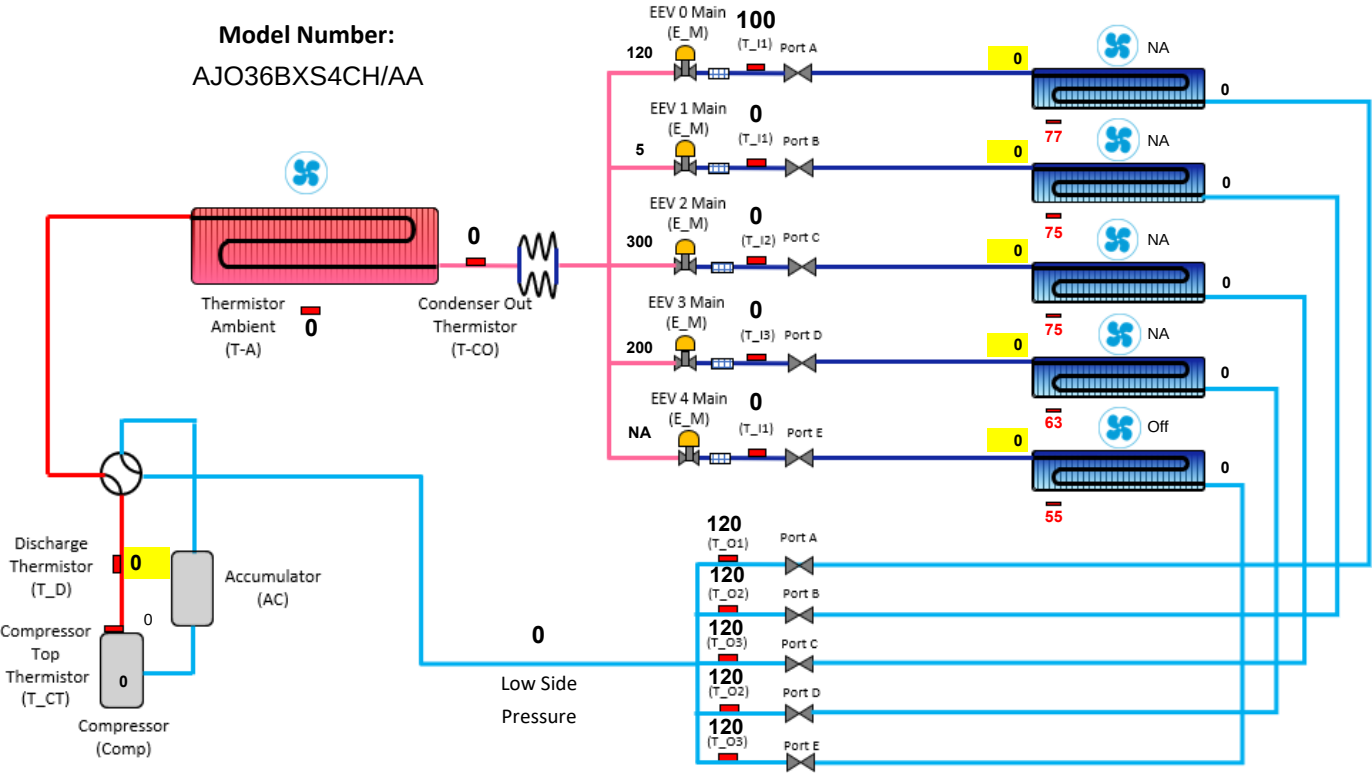

Comments:

K 4 Button Pushes	Information displayed
1	Compressor Frequency
2	Target Frequency
3	EEV 0 Steps
4	EEV 1 steps
5	EEV 2 Steps
6	EEV 3 steps
7	EEV 4 Steps
8	Fan RPM
9	Discharge Temperature
10	OLP Temperature
11	Condenser Out Temperature
12	Outdoor Temperature
13	Running Current
14	Target Discharge Temperature
15	Total Capacity of indoor units
16	Safety Control

0
0
120
5
300
200
NA
22
0
0
0
0
0
0
0

Indoor Capacity Set Point

A 9k
B 7k
C 15k
D 15k
E 15k

Basic Service

Operational modes - freeze protection control

❑ Anti-freeze control prevents frost formation on the indoor unit evaporator coil


- ❑ Indoor coil temperature below 37°F, compressor frequency reduced to 15Hz – 35Hz
- ❑ Indoor coil temperature drops below 31°F, compressor is stopped
- ❑ Freeze protection control de-activated when indoor coil temperature rises to 45°F - 50°F
- ❑ If indoor coil temperature drops below 40°F, the compressor frequency will be held



Basic Control Logic

Compressor Control


- Compressor Hz is determined by between outdoor temperature and ΔT . (ΔT is difference of between the room temperature and set temperature.)
 - When the room temperature approaches the set temperature, compressor Hz reduces.
- Fuzzy control

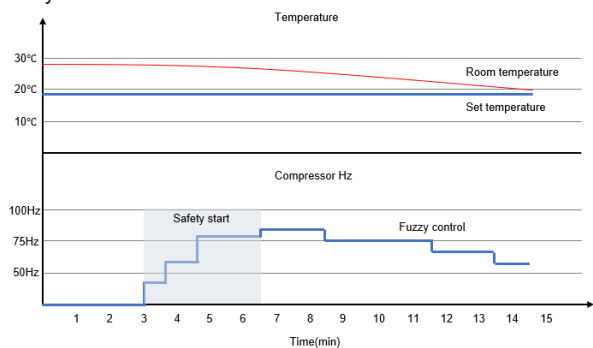

Basic Control Logic

EEV Control


- EEV initial step is determined according to compressor Hz and outdoor temperature.
- ① Secure the compression ratio and oil level in the compressor at the start up.
- ② Control refrigerant flow rate to get the proper oil dilution in compressor.
- After initial EEV step, EEV step is controlled to follow the target compressor discharge temperature.
- * Target compressor discharge temperature = $f(\text{Compressor Hz, Outdoor temperature})$

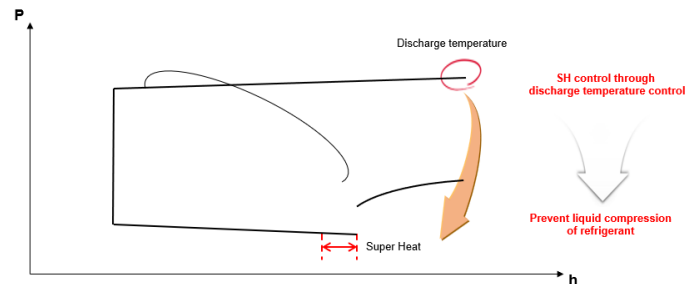

Protection control

Overload prevention control at heating mode

- Secure damage of compressor and cycle reliability, through reducing indoor unit's heat exchanger temperature.

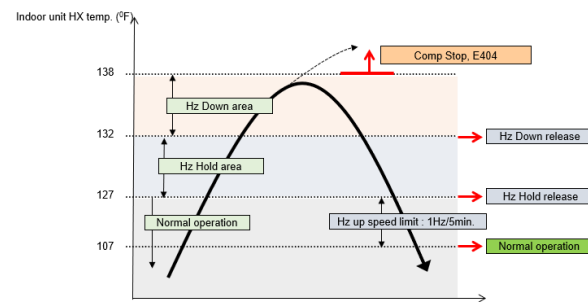

※ The values are subject to change according to the model.