



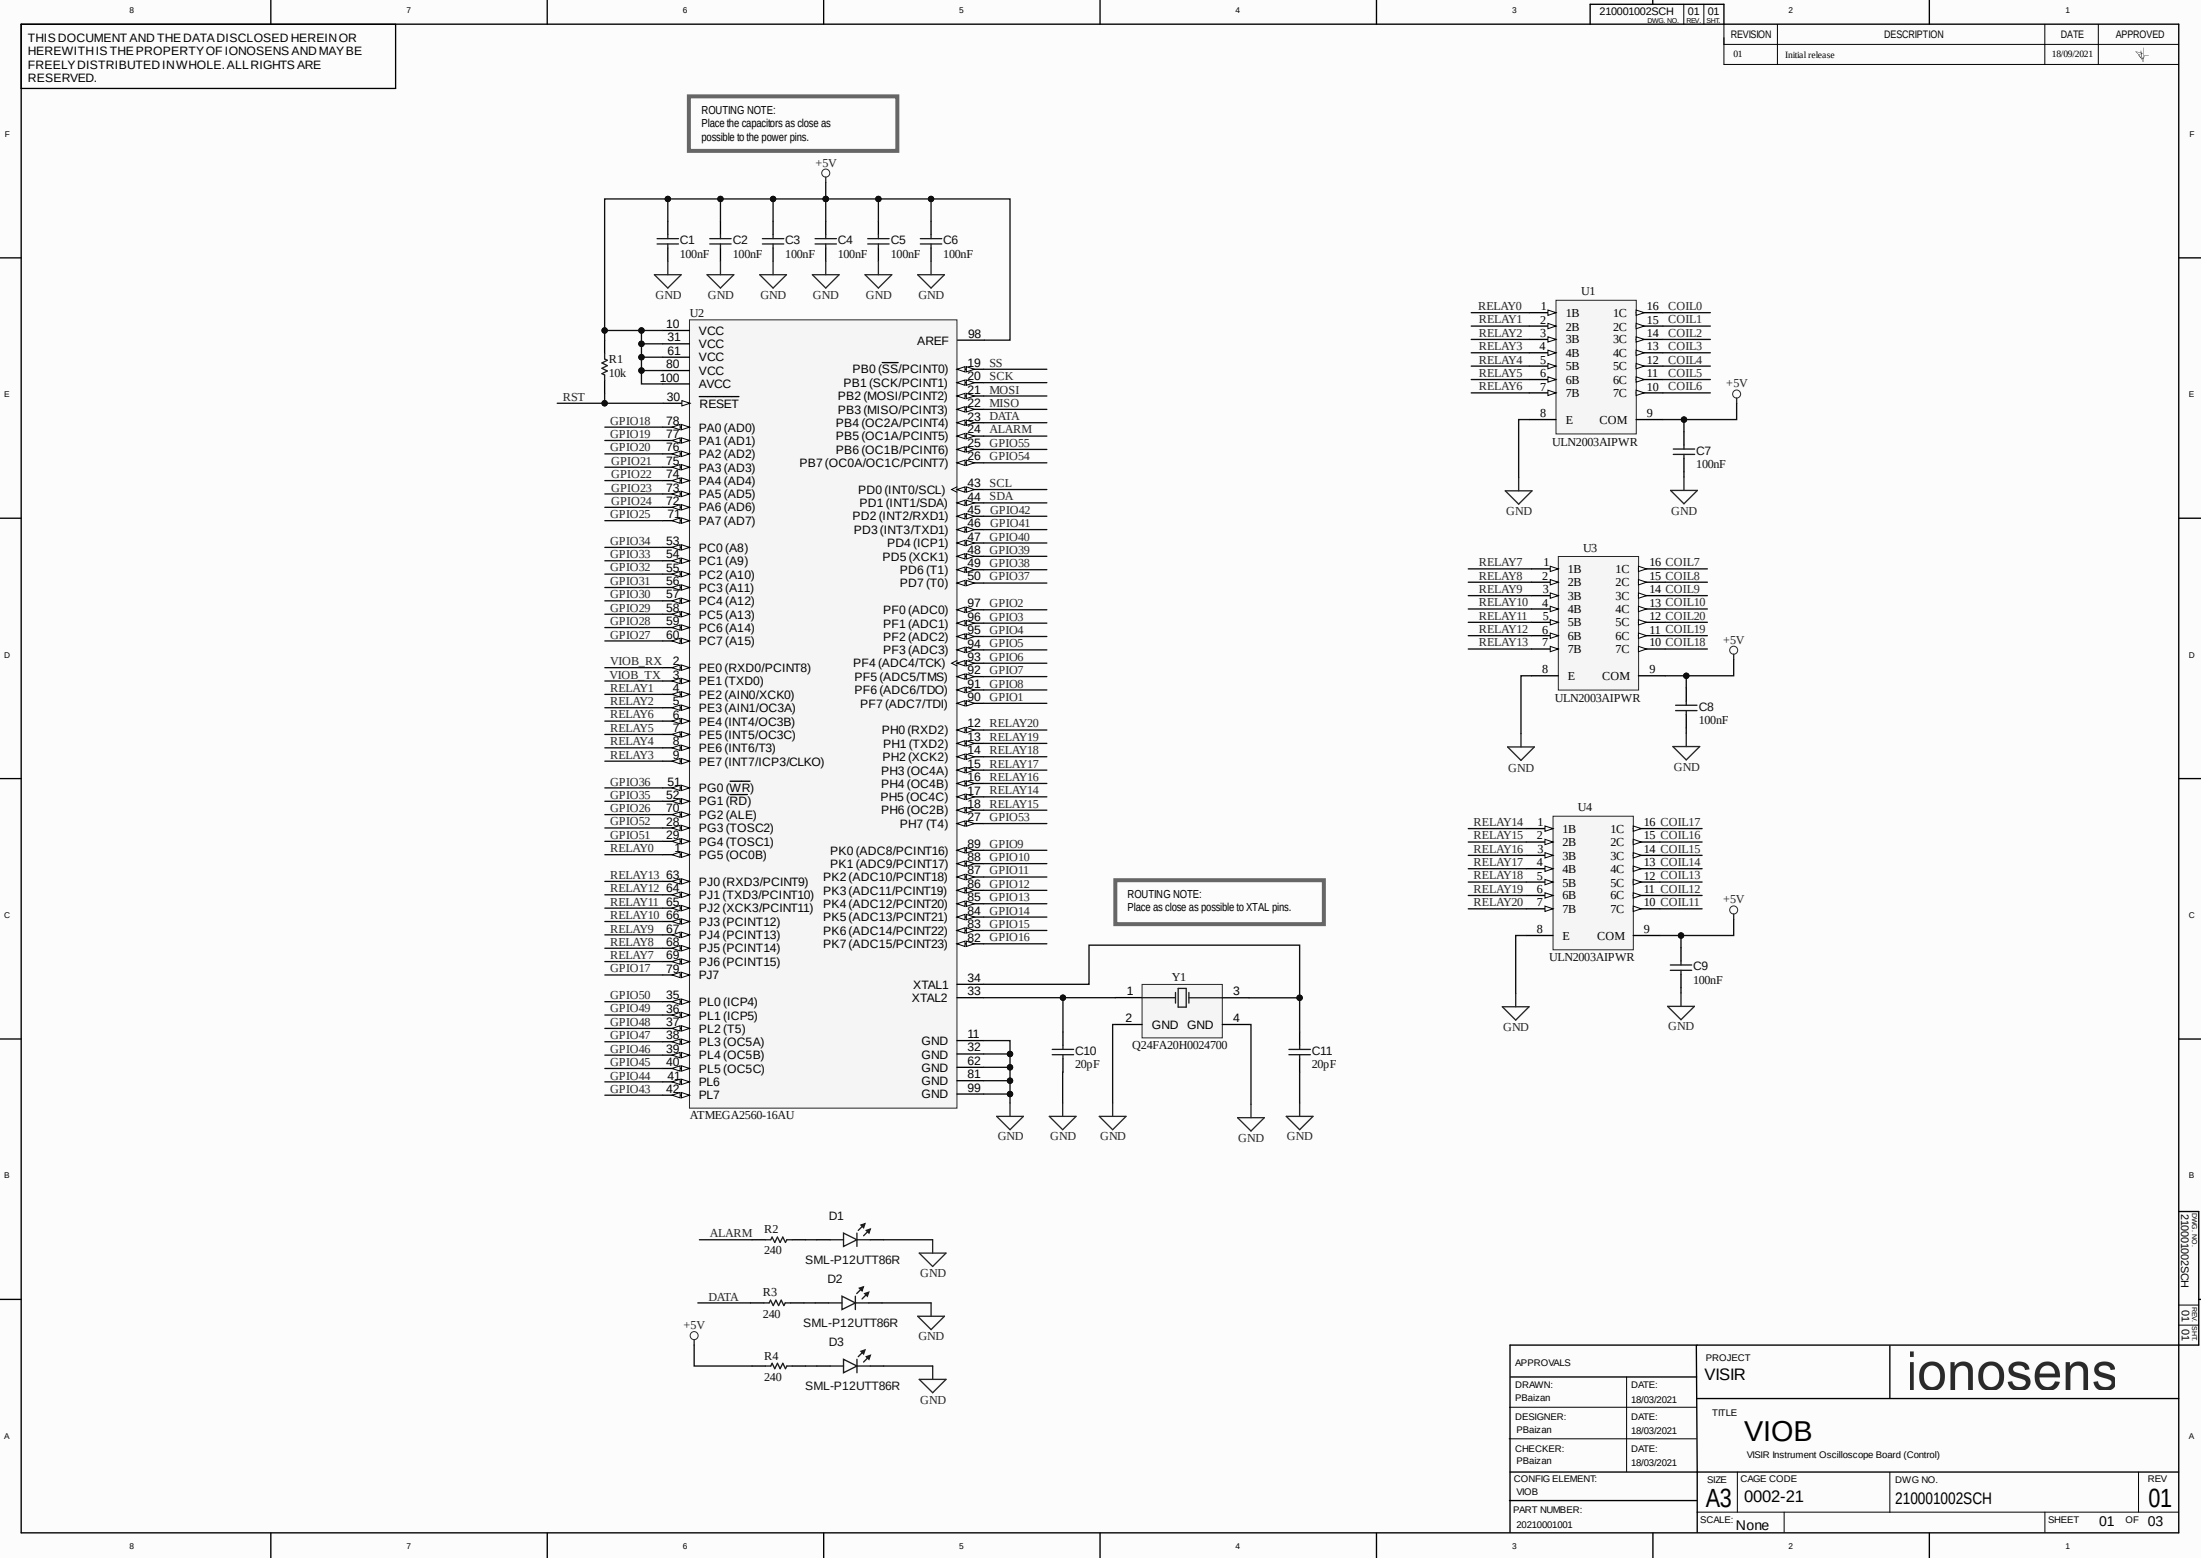

APPROVALS		PROJECT		ionosens	
DRAWN: P.Balan	DATE: 18/03/2021	VISIR			
DESIGNER: P.Balan	DATE: 18/03/2021	TITLE		VI0B	
CHECKER: P.Balan	DATE: 18/03/2021			VISIR Instrument Oscilloscope Board (Control)	
CONFIG ELEMENT: VI0B	SIZE: A3	CAGE CODE: 0002-21	DWG NO: 210001002SCH	REV 01	
PART NUMBER: 20210001001	SCALE: None			SHEET 01 OF 03	

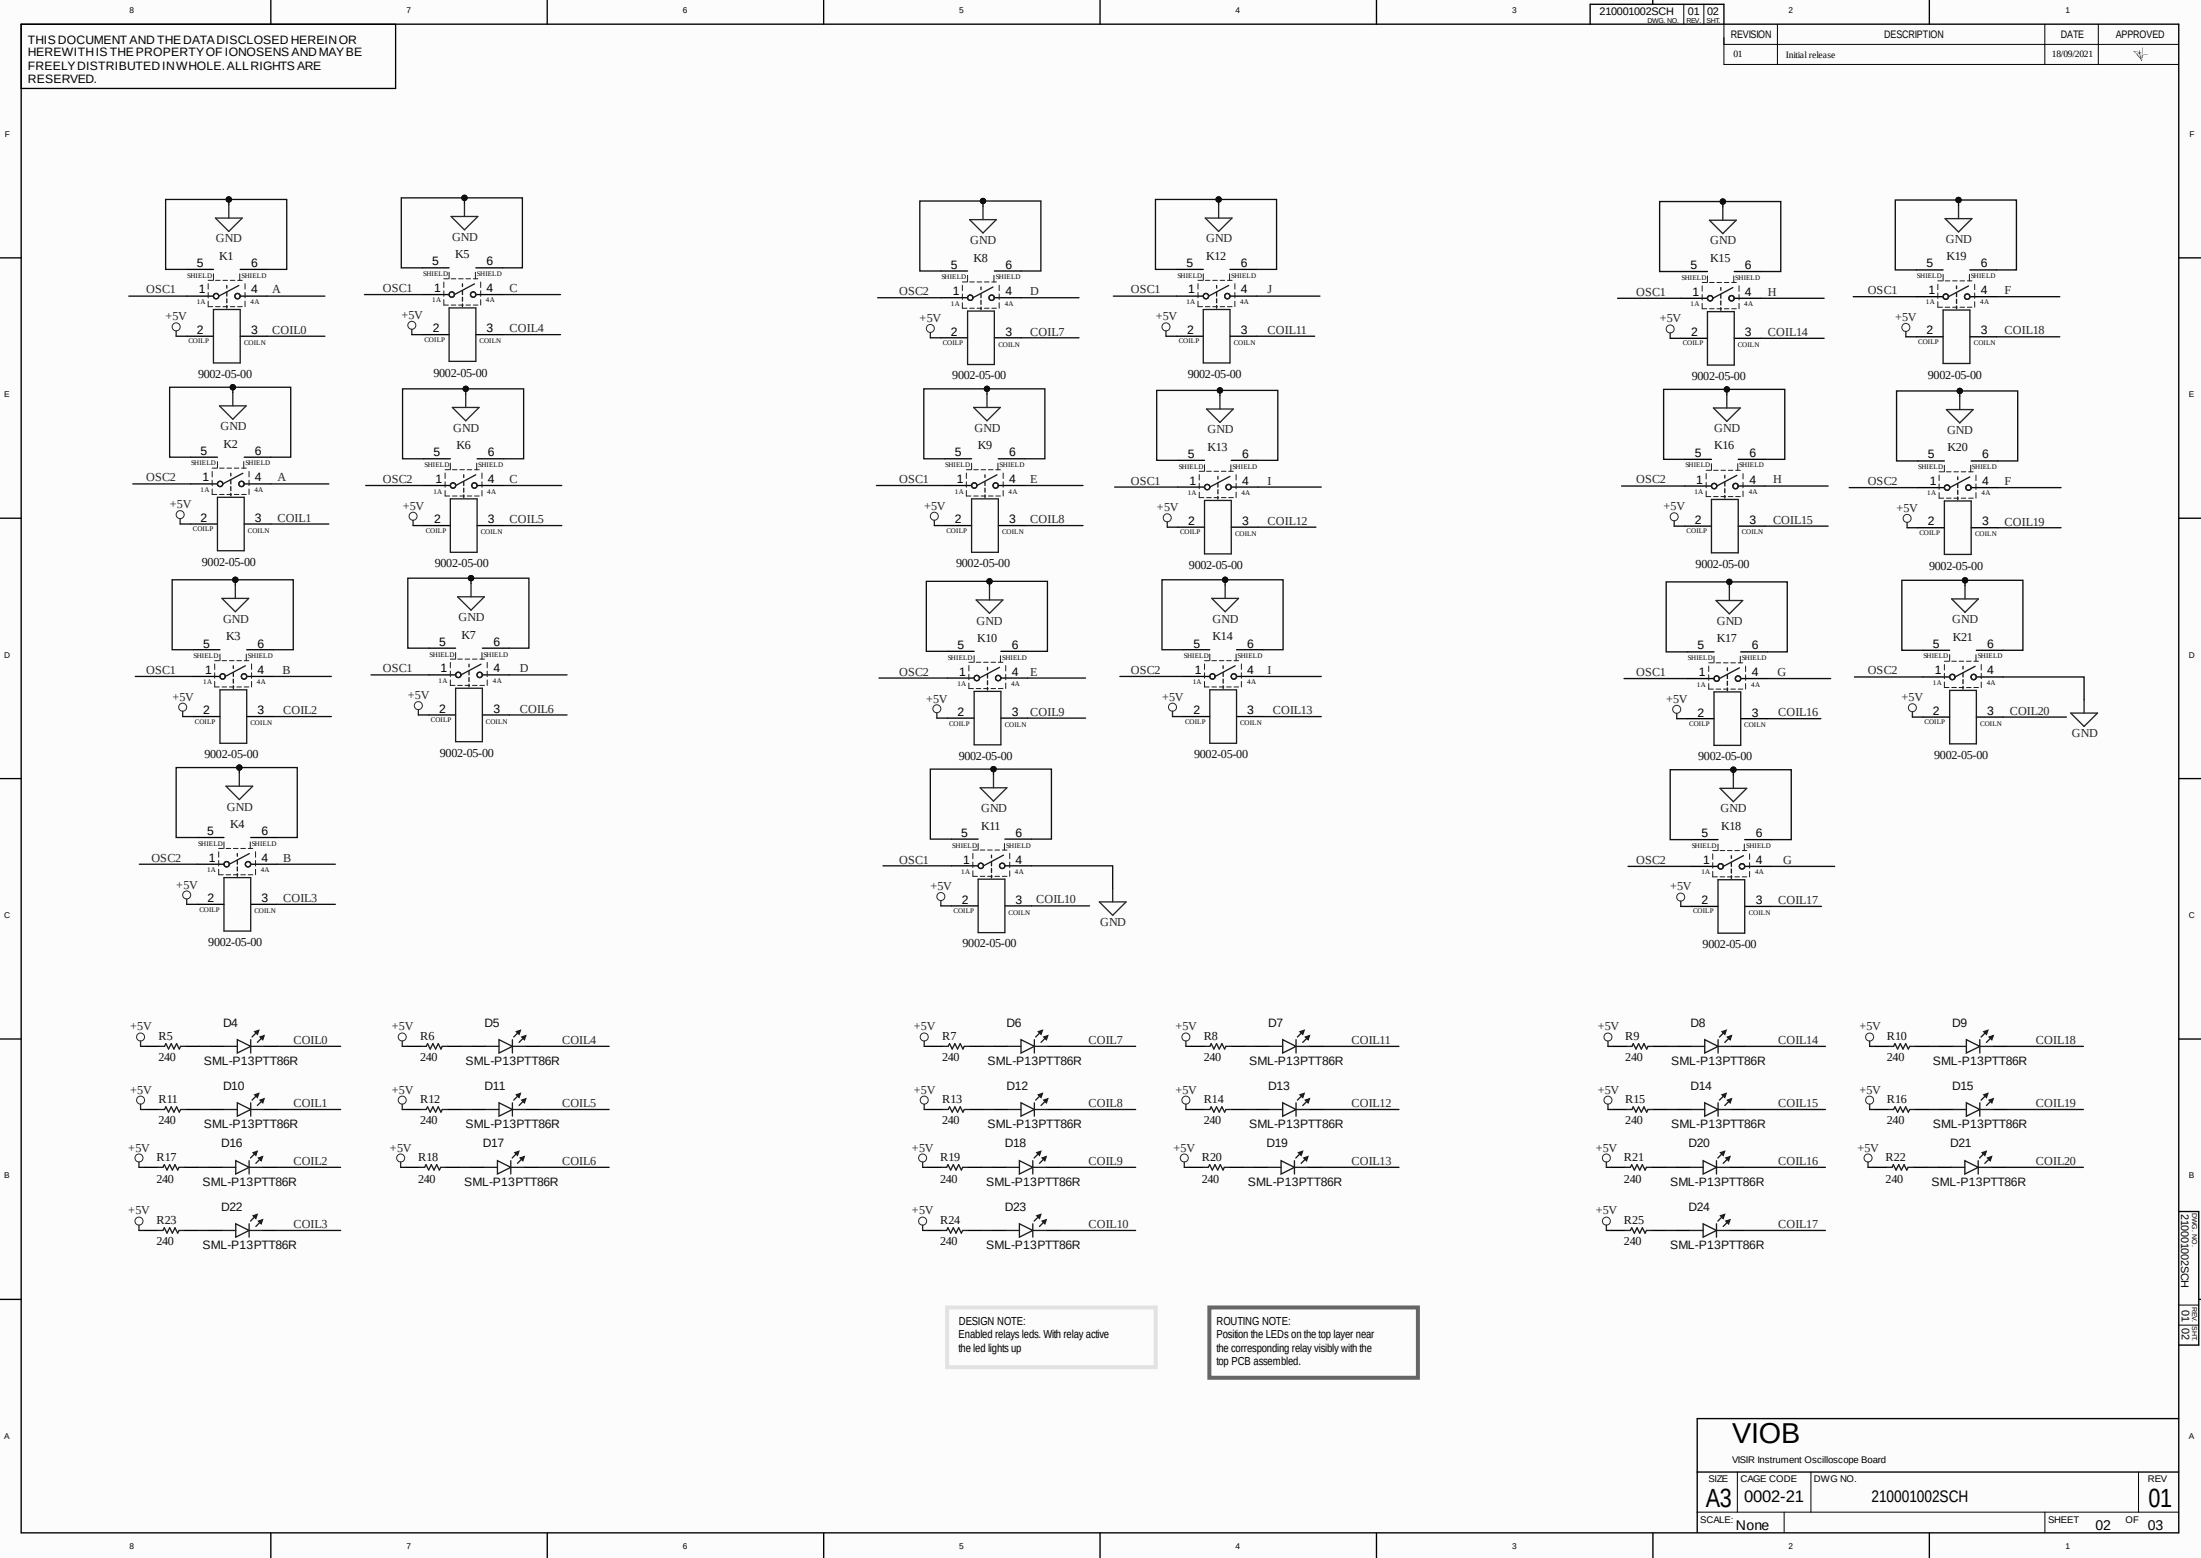


THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS THE PROPERTY OF IONOSENS AND MAY BE FREELY DISTRIBUTED IN WHOLE. ALL RIGHTS ARE RESERVED.

210001002SCH 01 03
DWG NO. REV. ISS.

REVISION	DESCRIPTION	DATE	APPROVED
01	Initial release	18/09/2021	


DESIGN NOTE:
In-System Programming Interface Connector




DESIGN NOTE:
In-System Programming uses the target Atmel AVR's internal SPI (Serial Peripheral Interface) to download code into the flash and EEPROM memories. Pinout and connector according to Atmel programming user guides.

DESIGN NOTE:
Current rating (per pin) depend on mated connector. Min current 4.3A and max 6.3A


DESIGN NOTE:
Debugger Connector



DESIGN NOTE:
Terminal UART and I2C. UART TX and RX definition from this board to Host




DESIGN NOTE:
WHEN MATING WITH ANOTHER LSHM-DV, PIN 01 WILL MATE WITH CONTACT 02 ON MATING CONNECTOR. WHEN MATING WITH A LSHM-DH, PIN 01 WILL MATE WITH PIN N, WHERE N=TOTAL NUMBER OF POSITIONS.

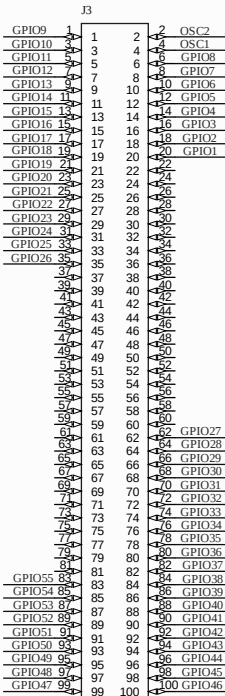

LSHM-150-06.0-L-DV-A-N-K-TR


DESIGN NOTE:
GPIOs Expansion Connector

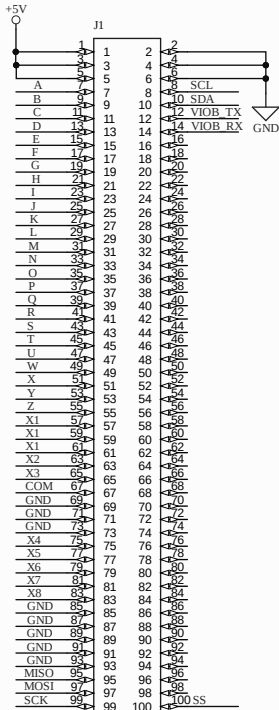


LSHM-150-06.0-L-DV-A-N-K-TR

DESIGN NOTE:
Main Connector

DESIGN NOTE:
Oscilloscope Channel1 Connector




DESIGN NOTE:
Oscilloscope Channel2 Connector



DESIGN NOTE:
2A current per pin
3x5 pins = 6A

11xGND pins = 22A
2x01 pins = 4A
2x02 pins = 4A
2x03 pins = 4A
3xCOM pins = 6A

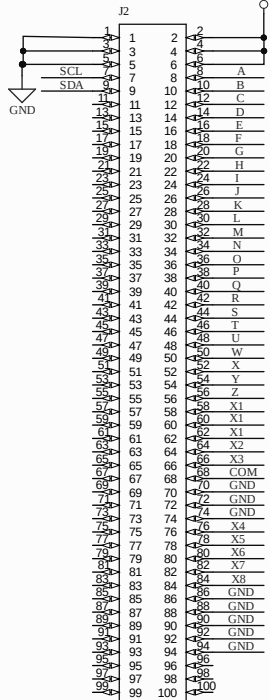

LSHM-150-06.0-L-DV-A-N-K-TR

DESIGN NOTE:
Breakboard Nodes Connector

VIOB

VSIR Instrument Oscilloscope Board (Connectors)

SIZE	CAGE CODE	DWG NO.	REV
A3	0002-21	210001002SCH	01
SCALE:	None	SHEET 03 OF 03	