| WAAS CH 77924 W22A | APP CRS 223° | Rwy ldg 5764 TDZE 2630 Apt Elev 2634 |
|---|---|---|

# RNAV (GPS) RWY 22
## FRANK WILEY FLD (MLS)

RNP APCH-GPS.

Baro-VNAV and VDP NA when using Glendive altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Glendive altimeter setting: increase LPV and LNAV/VNAV DA to 3047 and all visibilities ⅛ SM. Increase all MDA 180 feet and LNAV Cat C and D visibilities ⅝ SM and Circling Cat C and D visibilities ½ SM.

MISSED APPROACH: Climb to 6000 direct OPEJY and hold, continue climb-in-hold to 6000.

| ASOS | SALT LAKE CENTER | UNICOM |
|---|---|---|
| 135.575 | 126.85 305.2 | 123.0 (CTAF) L |

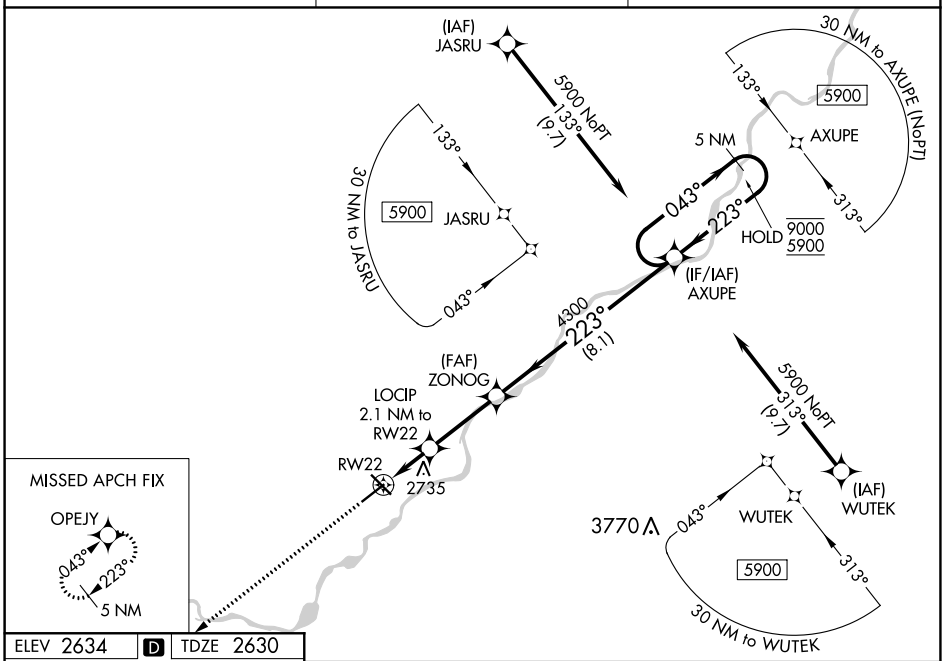


ELEV 2634 D TDZE 2630

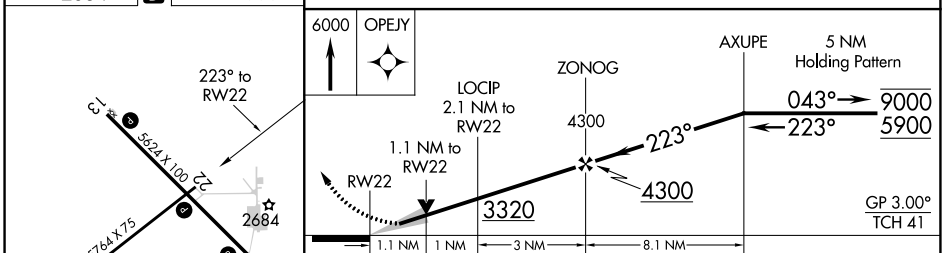


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 2880-1 250 (300-1) | | | |
| LNAV/VNAV DA | 2880-1 250 (300-1) | | | |
| LNAV MDA | 3000-1 370 (400-1) | | | |
| C CIRCLING | 3060-1 426 (500-1) | 3100-1 466 (500-1) | 3160-1½ 526 (600-1½) | 3320-2¼ 686 (700-2¼) |

MIRL Rwys 4-22 and 13-31 L
REIL Rwys 4, 13, 22 and 31 L

NW-1, 13 JUL 2023 to 10 AUG 2023

NW-1, 13 JUL 2023 to 10 AUG 2023