Ŗ

15 JUN 2023

ಠ


10 AUG 2023

RNAV (GPS) RWY 4

WASILLA (IYS) (PAWS)

Circling NA to Rwys 4S and 22S. Baro-VNAV and VDP NA when using Palmer allimeter setting. For uncompensated Baro-VNAV systems, LNAV/NNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Palmer altimeter setting and increase all DA 46 feet, all MDA 60 feet and all visibilities ¼ mile.

MISSED APPROACH: Climb to 1000 then climbing left turn and hold.

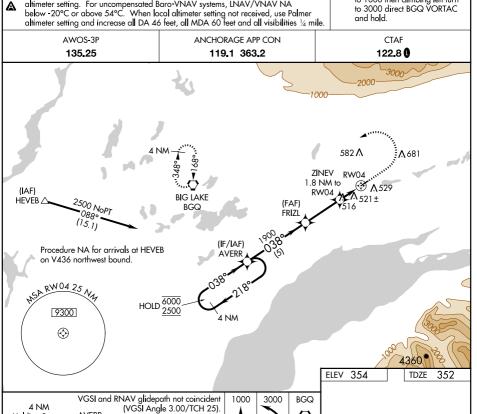

4 NM Holding Patte		(VGSI Angle 3.00)		3000	
6000 <u>←</u> 21	18° 38°→	FRIZL 1900 1	ZINEV 1.8 NM to RW04 *1.3 N/ RW0	\ A	/ only.
GP 3.00° TCH 45	<u> </u>		960	RW04	
CATEGORY	A	- 5 NM	M → 0.5 NM - C	-1.3 NM → D	
LPV DA	602-3/4 250 (300-3/4)		NA		
LNAV/ DA	828-15% 476 (500-15%)		NA		038° to
LNAV MDA 780-1 428 (500-1)		NA		RVV04	
					MIRI Rwy

1000-1 646 (700-1)

MIRL Rwy 4-22 0 REIL Rwys 4 and 22 1 WASILLA (IYS) (PAWS) RNAV (GPS) RWY 4

C CIRCLING

NA