WAAS CH 50202 W03A	APP CRS 035°	Rwy ldg 13000 TDZE 3667 Apt Elev 3671

RNAV (GPS) RWY 3
ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C . When local altimeter setting not received, Use Artesia altimeter setting: increase LPV DA to 3997 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4067 feet and all visibilities ⅛ SM; increase all MDAs 80 feet and LNAV visibility Cat C ⅜ SM, Cat D ⅛ SM and Circling visibility Cat D ¼ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct AQZED and hold.

ATIS	ROSWELL APP CON ★	ROSWELL TOWER ★	GND CON	CLNC DEL	UNICOM
128.45 306.2	119.6 239.0	118.5 (CTAF) 233.7	121.9 348.6	132.875 282.25	122.95

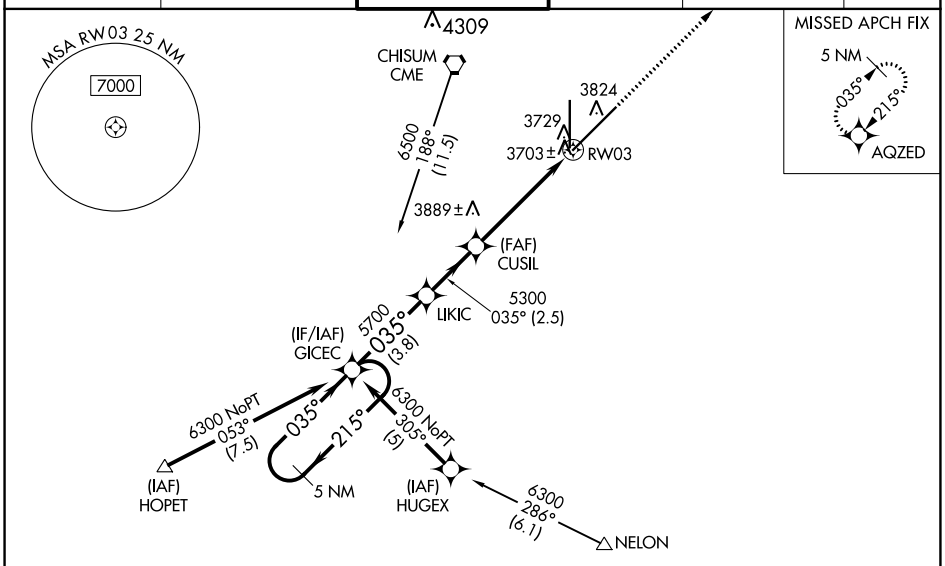

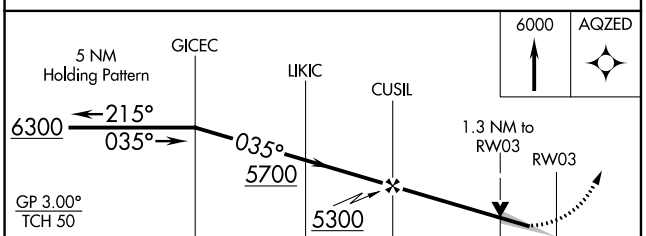

CATEGORY	A	B	C	D
LPV DA	3917-¾ 250 (300-¾)			
LNAV/VNAV DA	3987-1 320 (400-1)			
LNAV MDA	4140-1 473 (500-1)		4140-1¼ 473 (500-1¼)	4140-1½ 473 (500-1½)
CIRCLING	4140-1 469 (500-1)		4140-1½ 469 (500-1½)	4300-2 629 (700-2)

ELEV 3671 D TDZE 3667

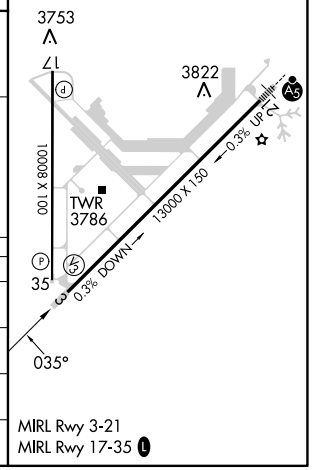

MIRL Rwy 3-21
MIRL Rwy 17-35 L

SW-1, 13 JUL 2023 to 10 AUG 2023