

WAAS

CH 42839

W03A

APP CRS

030°

Rwy Idg

TDZE

Apt Elev

8500

954

969

RNAV (GPS) RWY 3


PHOENIX GOODYEAR (GYR)

RNP APCH.

Procedure NA at night. Helicopter visibility reduction below ¾ SM NA. VDP NA when using Phoenix Sky Harbor Intl altimeter setting. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting: increase all MDA 80 feet and visibility LP/LNAV Cat C/D and Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 1900 then climbing left turn to 4000 direct TATUY and hold.

ATIS	LUKE APP CON ★	GOODYEAR TOWER ★	GND CON	UNICOM
118.35	125.45 263.125	120.1 (CTAF) 239.3	121.7	122.95

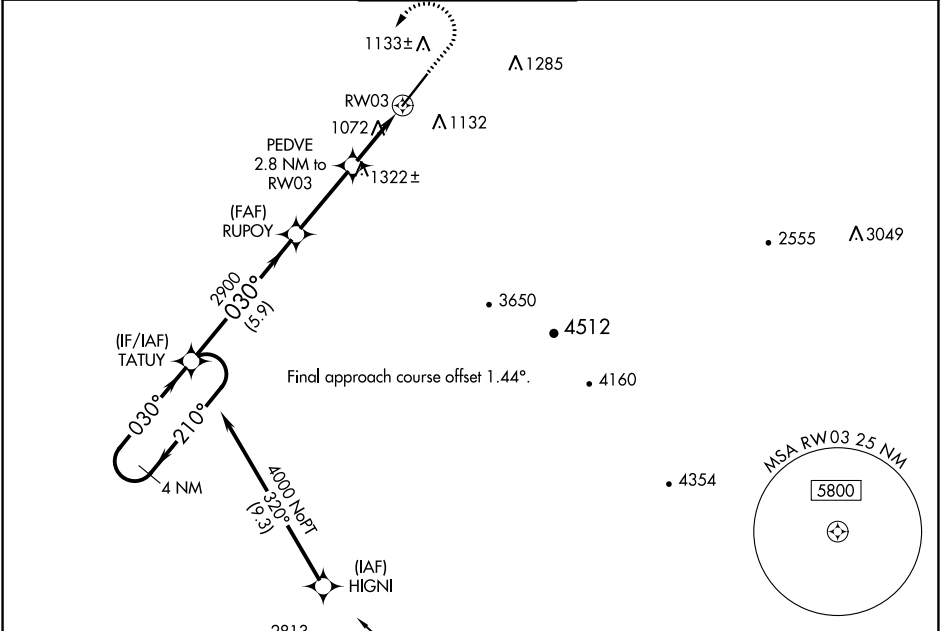

4 NM Holding Pattern

TATUY

RUPOY

PEDVE 2.8 NM to RW03

1900

4000

TATUY

1.1 NM to RW03

3.00° TCH 53

1880

5.9 NM

3.2 NM

1.7 NM

1.1 NM

CATEGORY	A	B	C	D
LP MDA	1340-1 386 (400-1)		1340-1½ 386 (400-1½)	
LNAV MDA	1580-1 626 (700-1)		1580-1¾ 626 (700-1¾)	
CIRCLING	1580-1 611 (700-1)		1860-2¾ 891 (900-2¾)	1920-3 951 (1000-3)

ELEV 969

TDZE 954

0.4% UP

0.3% DOWN

TWR

030° to RW03

REIL Rwy 3 and 21
MIRL Rwy 3-21