NC-3,

13 JUL 2023 to 10 AUG 2023


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Kansas City Intl altimeter setting. Straight-In minimums NA at night. When local altimeter setting not received, use Kansas City Intl altimeter setting and increase all DA 97 feet and increase LPV visibility 1/8 mile and LNAV/VNAV visibility 3/8 mile all Cats; increase all MDA 100 feet and LNAV Cat C and D visibility ¼ mile, and Circling Cat C ½ mile, Cat D ¼ mile.


MISSED APPROACH: Climb to 3100 direct OVEGE and hold.

ATIS 125.05 ST. JOSEPH APP CON \* 120.35 360.8

ST. JOSEPH TOWER \* 126.9 (CTAF) 0 239.0 GND CON 121.9

UNICOM 122.95

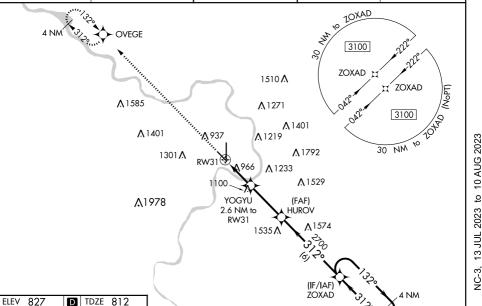

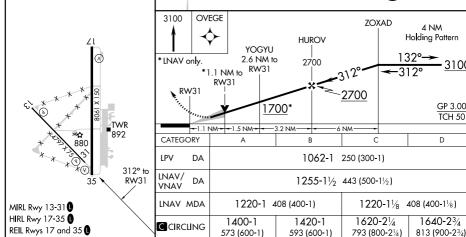

ST. JOSEPH, MISSOURI

ROSECRANS MEML (STJ)

3100

GP 3.00°

TCH 50

RNAV (GPS) RWY 31