

APP CRS	Rwy Idg	<b>11200</b>
<b>050°</b>	TDZE	<b>747</b>
	Apt Elev	<b>796</b>

## RNAV (RNP) Z RWY 5L

INDIANAPOLIS INTL (IND)

For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS required. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM. Simultaneous approach authorized.

ALSF-2



**MISSED APPROACH:**  
Climbing left turn to  
3000 direct KEADY  
and hold.

D-ATIS  
**134.25**


INDIANAPOLIS APP CON  
128.175 317.8

INDY TOWER  
120.9 257.8

GND CON  
**121.9**

CLNC DEL  
**128.75 257.8**

CPDLC

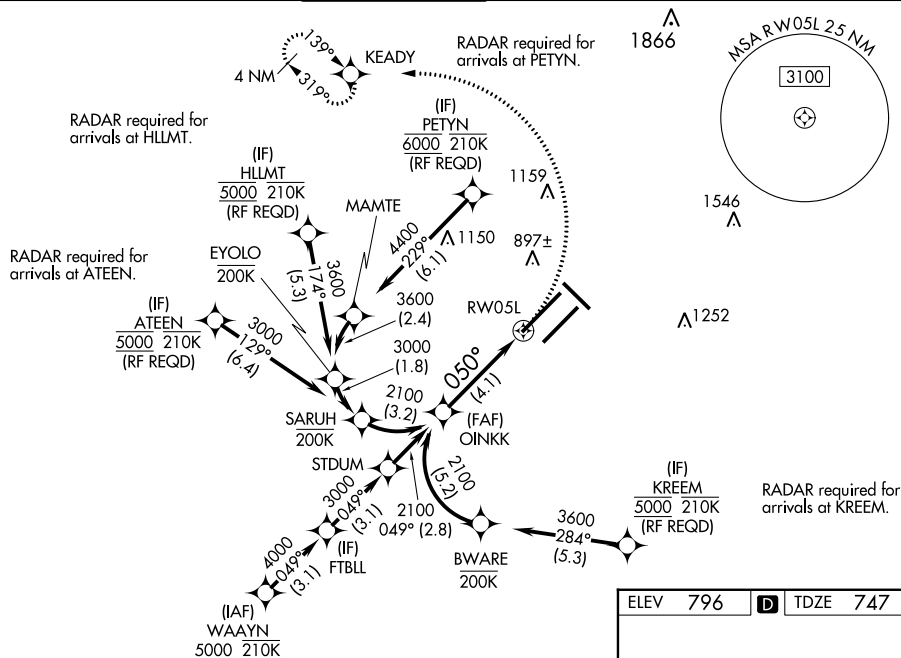

VGSI and RNAV glidepath not coincident  
(VGSI Angle 3.00/TCH 74).

3000	KEADY
------	-------

2100

GP 3.00°  
TCH 53

See planview for multiple IF locations.

---

CATEGORY

A

---


C

D

RNP 0.30 DA	1197/60	450 (500-1¼)
-------------	---------	--------------

**AUTHORIZATION REQUIRED**

ELEV	796		TDZE	747
------	-----	---	------	-----



HIRL all Rwy's  
TDZ/CL Rwy's 5L and 5R