

APP CRS  
**222°**

Rwy Idg  
TDZE  
Apt Elev

**12020**  
**3950**  
**3962**

**RNAV (RNP) Z RWY 22**  
EL PASO INTL (ELP)

RNP AR APCH


▼

For uncompensated Baro-VNAV systems, procedure NA below -8°C ASR or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 4000 and RNP 0.30 all Cats visibility to RVR 4500.


MALSR

MISSED APPROACH: Climb to 4400 then climbing left turn to 7500 direct FABAN and hold.

D-ATIS <b>120.0 254.3</b>	EL PASO APP CON <b>124.25 298.85</b>	EL PASO TOWER <b>118.3 239.275</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>125.0 379.1</b>
------------------------------	---	---------------------------------------	-------------------------------	--------------------------------

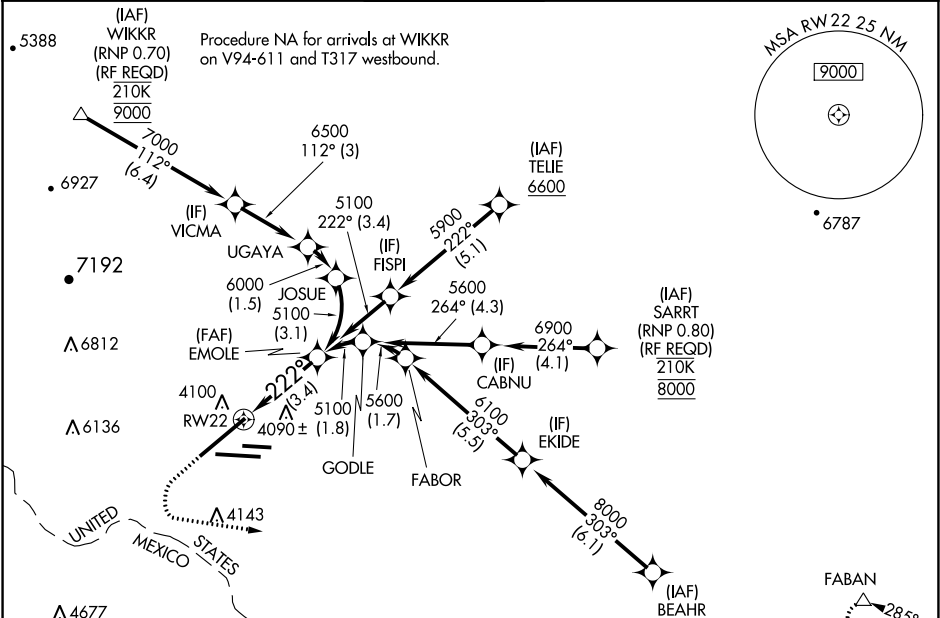

ELEV 3962	<b>D</b>	TDZE 3950
-----------	----------	-----------

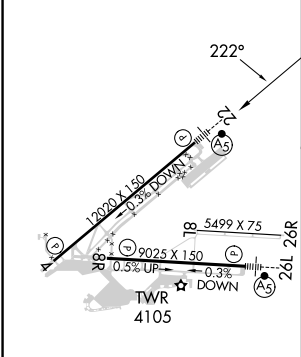

See planview for multiple IF locations.			
3.4 NM			
CATEGORY	A	B	C
RNP 0.10 DA	4200/24	250 (300-1/2)	
RNP 0.30 DA	4270/27	320 (400-5/8)	

**AUTHORIZATION REQUIRED**