

WAAS Ch 42817 W23A	APP CRS 228°	Rwy Idg 5002 TDZE 1013 Apt Elev 1013
--	------------------------	---


RNAV (GPS) RWY 23

PICKENS COUNTY (LQK)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F), DME/DMD RNP-0.3 NA. When local altitude setting not received, use Clemsom altimeter setting and increase LPV DA to 1356 feet and visibility all Cots ¼ SM; increase LNAV/VNAV DA to 1594 feet; increase all MDAs 60 feet and LNAV Cat C and Circling Cat D visibility ¼ SM, increase LNAV Cat D visibility ½ SM. Baro-VNAV NA when using Clemsom altimeter setting. VDP NA with Clemsom altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
ZAKOB and hold.

AWOS-3 120.0	GREER APP CON ★ 118.8 270.275	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

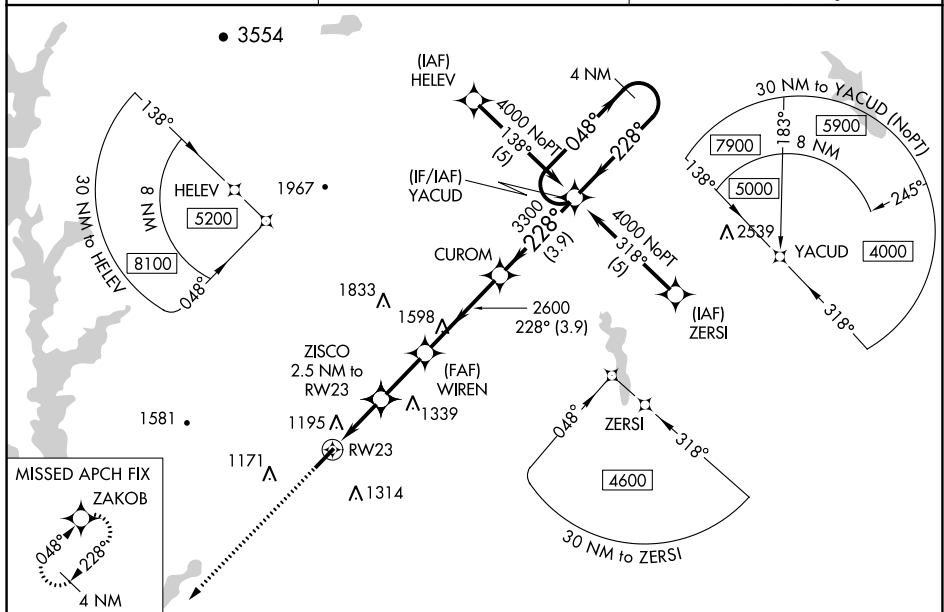

ELEV 1013	TDZE 1013
-----------	-----------



CATEGORY	A	B	C	D
LPV DA		1310-1	297 (300-1)	
RNAV/ RNAV DA		1548-2	535 (600-2)	
RNAV MDA	1500-1	487 (500-1)	1500-1 ³ / ₈ 487 (500-1 ³ / ₈)	1500-1 ¹ / ₂ 487 (500-1 ¹ / ₂)
CIRCLING	1560-1 547 (600-1)	1620-1 607 (700-1)	1620-1 ³ / ₄ 607 (700-1 ³ / ₄)	1780-2 ¹ / ₂ 767 (800-2 ¹ / ₂)