

NORWALK, OHIO

AL-6640 (FAA)

20310

WAAS CH 86835 W28A	APP CRS 276°	Rwy Idg 3541 TDZE 851 Apt Elev 853
--	------------------------	---

RNAV (GPS) RWY 28


NORWALK-HURON COUNTY (5A1)

RNP APCH.

T Rwy 28 helicopter visibility reduction below 1 SM NA. Procedure NA at night.
A NA Use Cleveland-Hopkins Intl altimeter setting.

MISSED APPROACH: Climb to 3000 direct JUROL and hold.

CLE ASOS 127.85	CLEVELAND APP CON ★ 124.2 360.65	UNICOM 122.8 (CTAF) 0
---------------------------	--	--

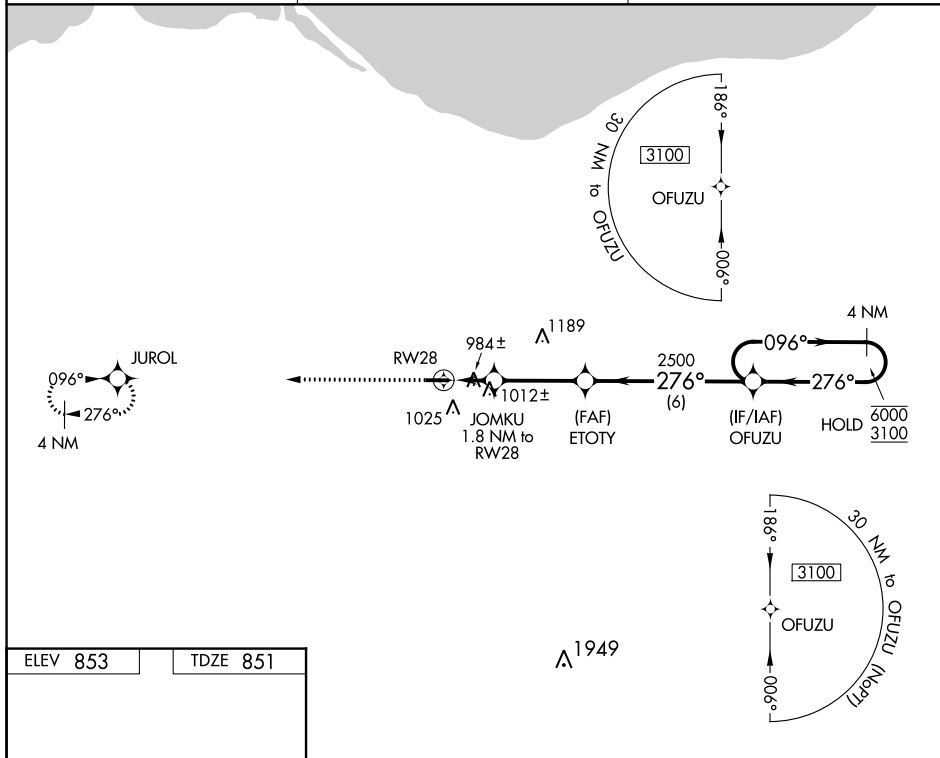

The diagram illustrates the holding pattern for MIRL Rwy 10-28. It shows a 4 NM holding pattern with a 3.00° TCH 40° approach. Key locations include JOMKU (1.8 NM to RW28), ETOTY, and OFUZU. The holding pattern is defined by a 276° inbound leg and a 096° outbound leg. The diagram also shows the runway layout with a 0.4% UP slope and a 4208 X 75 dimension. A drag strip is indicated for the runway.

CATEGORY	A	B	C	D
LP MDA	1320-1	469 (500-1)	1320-1 $\frac{3}{8}$ 469 (500-1 $\frac{3}{8}$)	NA
LNAV MDA	1360-1	509 (600-1)	1360-1 $\frac{3}{8}$ 509 (600-1 $\frac{3}{8}$)	NA
C CIRCLING	1420-1	567 (600-1)	1440-1 $\frac{1}{2}$ 587 (600-1 $\frac{1}{2}$)	NA

NORWALK, OHIO
Orig-B 16AUG18

41°15'N-82°33'W

NORWALK-HURON COUNTY (5A1)
RNAV (GPS) RWY 28

EC-2, 13 JUL 2023 to 10 AUG 2023

EC-2, 13 JUL 2023 to 10 AUG 2023