


APP CRS	Rwy Idg	8424
096°	TDZE	7
	Apt Elev	65

RNAV (RNP) Y RWY 10L

FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

RNP AR APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7°C or above 54°C.				MALSR AS	MISSED APPROACH: Climb to 500, then climb to 4000 direct MARTS and hold, continue climb-in-hold to 4000.
D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4	CPDLC

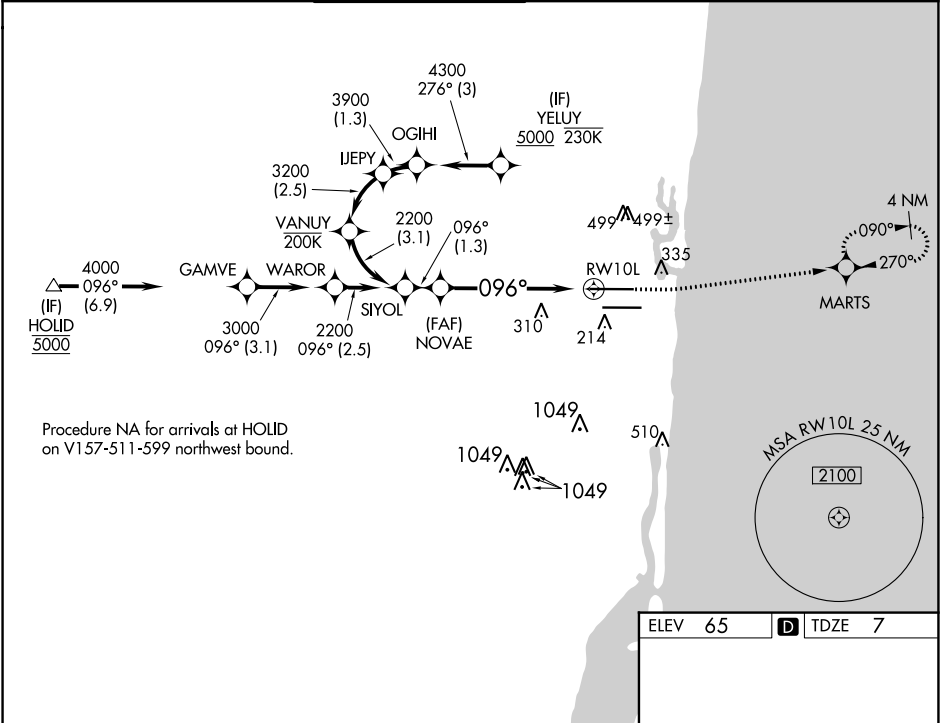

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).

500 4000 MARTS

See planview for multiple IF locations.

GP 3.00° TCH 49

SIYOL 2200 096°

NOVAE 1800

1800

1.3 NM 5.5 NM

RW10L

66 9000 X 150 28R 10R 8000 X 150 1.0% UP 0.4% DOWN

CATEGORY	A	B	C	D
RNP 0.15 DA		337/26	330 (300-½)	
RNP 0.30 DA		391/35	384 (400-¾)	

AUTHORIZATION REQUIRED

HIRL Rwy 10L-28R and 10R-28L