

# RNAV (GPS) RWY 20

## VETERANS AIRPORT OF SOUTHERN ILLINOIS (MWA)


**T** Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 ½ SM.




**MISSED APPROACH:**  
Climb to 2400 direct  
ANUKE and hold.

UNICOM

**122.95**



D	TDZE	468
---	------	-----

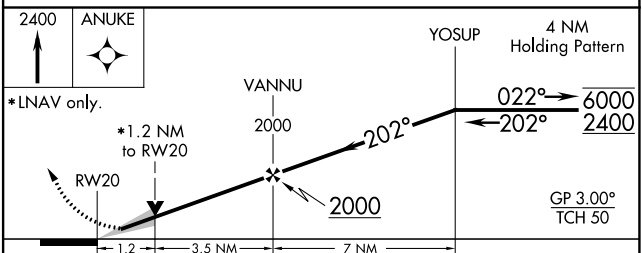

CATEGORY		A		B		C		D	
LPV	DA	668-1/2 200 (200-1/2)							
LNAV/ VNAV	DA	773-1/2 305 (400-1/2)							
LNAV	MDA	880-1/2 412 (500-1/2)				880-3/4 412 (500-3/4)			
CIRCLING		920-1 448 (500-1)		940-1 468 (500-1)		1040-1 1/2 568 (600-1 1/2)		1340-2 3/4 868 (900-2 3/4)	

VETERANS AIRPORT OF SOUTHERN ILLINOIS (MWA)  
37°45'N-89°01'W **RNAV (GPS) RWY 20**