WAAS CH 77834 W02A	APP CRS 023°	Rwy ldg 5000 TDZE 805 Apt Elev 812

RNAV (GPS) RWY 2
LA PORTE MUNI (PPO)

Baro-VNAV NA when using South Bend altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use South Bend altimeter setting and increase all DA 49 feet, and all MDA 60 feet; increase LNAV/VNAV all Cats and LNAV Cat C/D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. Circling Rwy 14, 32 NA at night.

MISSED APPROACH: Climb to 2500 direct BOOTE and hold.

AWOS-3	SOUTH BEND APP CON ★	UNICOM
119.825	132.05 257.8	123.0 (CTAF) L

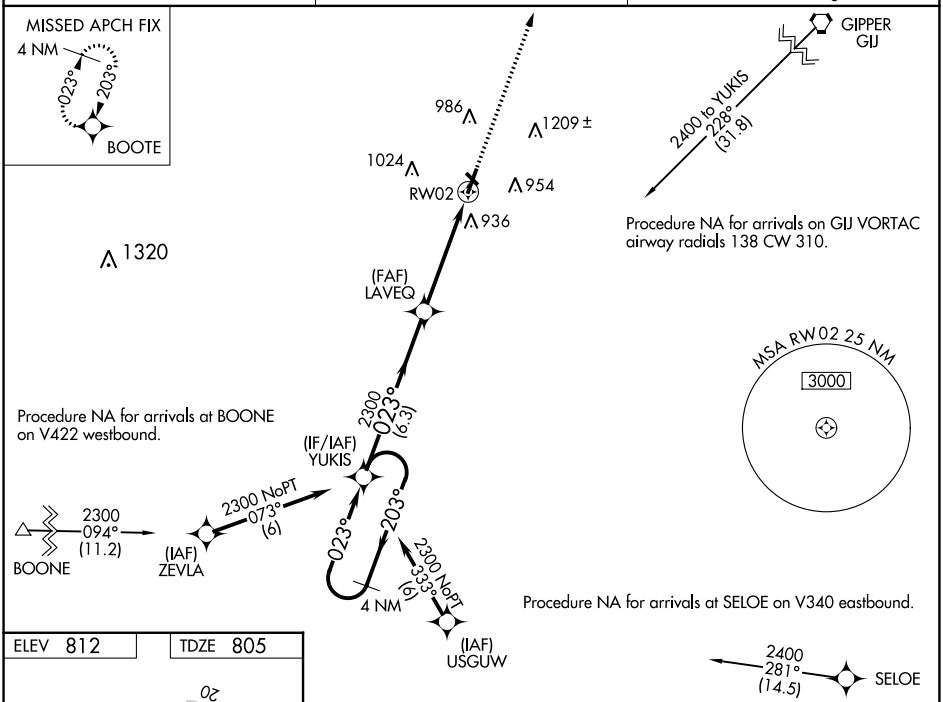

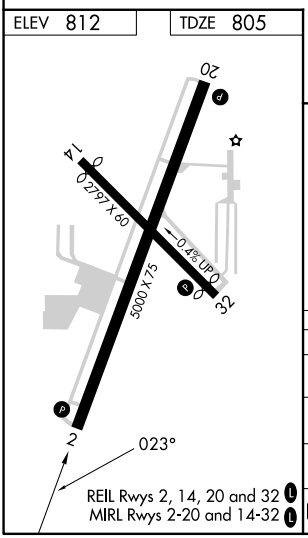

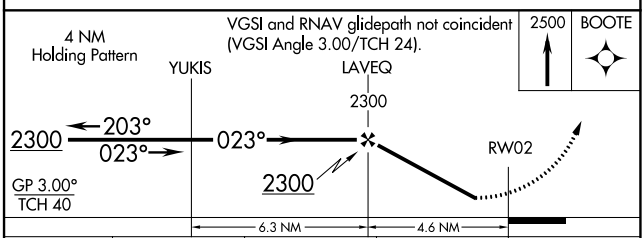

CATEGORY	A	B	C	D
LPV DA	1067-1 262 (300-1)			
LNAV/VNAV DA	1220-1⅜ 415 (500-1⅜)			
LNAV MDA	1220-1 415 (500-1)		1220-1⅛ 415 (500-1⅛)	
C CIRCLING	1320-1 508 (600-1)		1560-2¼ 748 (800-2¼)	1560-2½ 748 (800-2½)

EC-2, 13 JUL 2023 to 10 AUG 2023
EC-2, 13 JUL 2023 to 10 AUG 2023