

FORT POLK, LOUISIANA

## RNAV (GPS) RWY 34

APCH CRS <b>338°</b>	Rwy Idg <b>4107</b>
	THRE <b>278</b>
	Arpt Elev <b>330</b>

AL-5096 [USA]

POLK AAF (KPOE)

RADAR required for arrivals at DXB NDB and CATVO.

ALSF-1

▼ \* When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1½ mile.





MISSED APPROACH: Climb to 2000 direct BITAY and on track 340° to COCOS and hold.


ATIS <b>134.85 282.2</b>	POLK APP CON <b>123.7 261.3</b>	POLK TOWER★ <b>119.0(CTAF) 257.75</b>	GND CON <b>121.8 239.25</b>	ASR/PAR
-----------------------------	------------------------------------	--	--------------------------------	---------

DME/DME RNP-0.3 NA

CAUTION: Pilots using this approach must acquaint themselves with any activities in R-3804A/B and R-3803A/C located 6 NM north of COCOS.

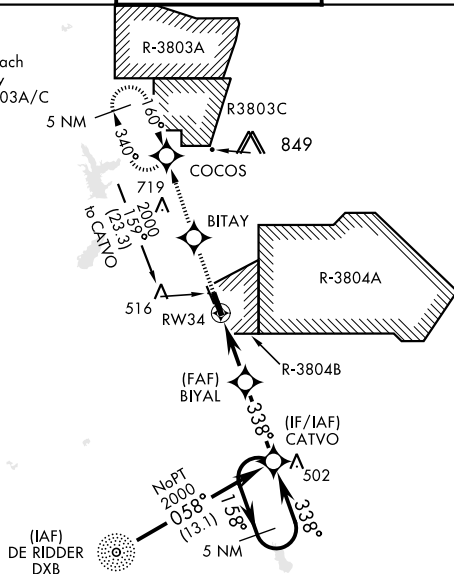

ELEV 330	THRE 278
Rwy 16 Idg 3913'	

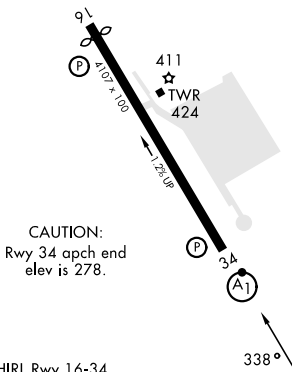

HIRL Rwy 16-34  
REIL Rwy 16-34

2000	BITAY	COCOS	VGSI and descent angles not coincident.			
			5 NM Holding Pattern			
CATEGORY	A	B	C	D		
LNAV MDA*	760-34	482 (500-34)	760-1	482 (500-1)		
CIRCLING	820-1	490 (500-1)	820-1½	880-2		
			490 (500-1½)	550 (600-2)		

FORT POLK, LOUISIANA

31° 03'N-93° 11'W

POLK AAF (KPOE)

Amdt 1A 03NOV22

## RNAV (GPS) RWY 34