


WAAS CH <b>69220</b> <b>W13A</b>	APP CRS <b>133°</b>	Rwy Idg TDZE <b>836</b> Apt Elev <b>836</b>
--	------------------------	---

RNAV (GPS) RWY 13

SMITH FLD (SMD)

RNP APCH. ▼ NA Procedure NA at night. Rwy 13 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Fort Wayne Intl altimeter setting: increase LPV DA to 1162 feet; LNAV/VNAV DA to 1435 feet; increase all MDA 40 feet and LNAV Cat C visibility ¼ SM. Baro-VNAV NA when using Fort Wayne Intl altimeter setting.		MISSED APPROACH: Climb to 2600 direct CUKEP and on track 043° to ZOBID and on track 313° to OHOCY and on track 280° to UDOMY and hold.
AWOS-3 <b>124.55</b>	FORT WAYNE APP CON <b>127.2 284.6</b>	UNICOM <b>122.8 (CTAF) 0</b>

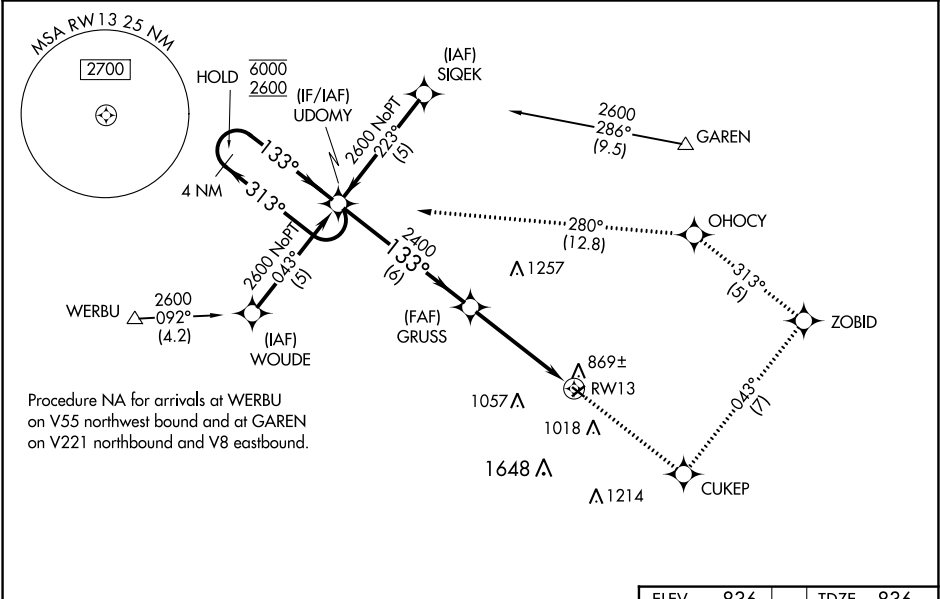

ELEV 836		TDZE 836	
2600	CUKEP	tr 043°	ZOBID
		tr 313°	OHOCY
		tr 280°	UDOMY
4 NM Holding Pattern UDOMY			

MIRL Rwy 5-23 and 13-31 0