


WAAS CH <b>53619</b> <b>W28A</b>	APP CRS <b>284°</b>	Rwy Idg <b>4000</b> TDZE <b>881</b> Apt Elev <b>881</b>
--	------------------------	---

RNAV (GPS) RWY 28

FULTON COUNTY (NY)

RNP APCH - GPS.	MISSED APPROACH: Climb to 5000 direct ASQEV and hold, continue climb-in-hold to 5000.
Rwy 28 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.	

AWOS-3 <b>119.225</b>	ALBANY APP CON <b>118.05</b>	UNICOM <b>122.7 (CTAF) 0</b>
--------------------------	---------------------------------	---------------------------------

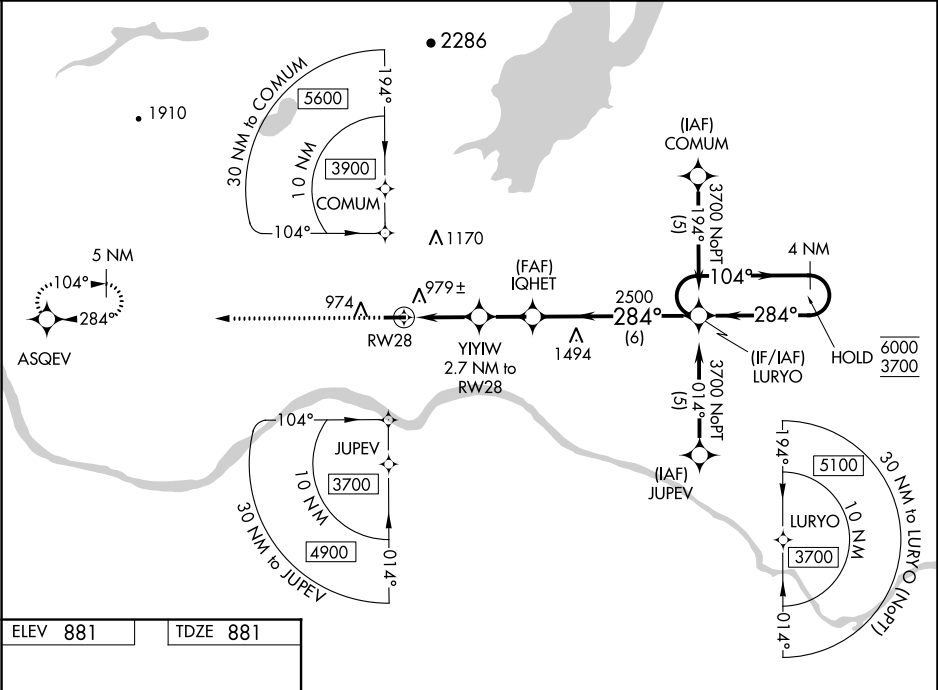

ELEV 881	TDZE 881
5000 ASQEV VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).	
LURYO 4 NM Holding Pattern 104° 6000 284° 3700 GP 3.20° TCH 52	
YIYW 2.7 NM to RW28 1 NM to RW28 1.7 NM 1.9 NM 6 NM	
RW28 284° to RW28	
CATEGORY A B C D	
LPV DA 1131-¾ 250 (300-¾) NA	
LNAV/VNAV DA 1141-¾ 260 (300-¾) NA	
LNAV MDA 1240-1 359 (400-1) NA	
CIRCLING 1280-1 1340-1 NA 399 (400-1) 459 (500-1)	