

WAAS
CH **82130**
W09A

APP CRS
085°

Rwy Idg **3400**
TDZE **1522**
Apt Elev **1523**

RNAV (GPS) RWY 9

LANGLADE COUNTY (AIG)

RNP APCH.

▼

Rwy 9 helicopter visibility reduction below ¾ SM NA.

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18C or above 54°C.

AWOS-3
119.075

MINNEAPOLIS CENTER
124.4 317.7

UNICOM
122.8 (CTAF) 0

MISSED APPROACH:
Climb to 3400 direct
HEDIG and hold.

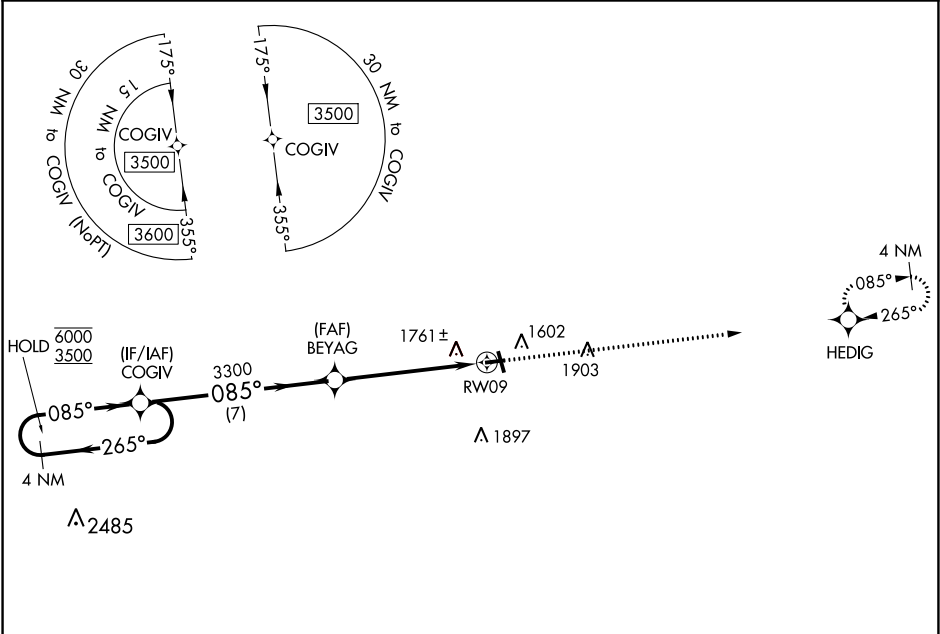

4 NM Holding Pattern

COGIV

BEYAG

RW09

HEDIG

*LNAV only.

GP 3.00° TCH 40

7 NM

3.9 NM

1.6 NM

3400

3500

6000

265°

085°

085°

3300

3400 X 75

35

085°

CATEGORY	A	B	C	D
LPV DA	1772-1 250 (300-1)			
LNAV/VNAV DA	2135-2¼ 613 (700-2¼)			
LNAV MDA	2080-1 558 (600-1)		2080-1½ 558 (600-1½)	
CIRCLING	2120-1 597 (600-1)		2260-2 737 (800-2) 2260-2¼ 737 (800-2¼)	

ELEV 1523

TDZE 1522

REIL Rwy 17 and 35 0
MIRL Rwy 17-35 and 9-27 0