

| | | |
|--|------------------------|---|
| WAAS CH 69300 W05A | APP CRS 049° | Rwy Idg 5000 TDZE 928 Apt Elev 928 |
|--|------------------------|---|

RNAV (GPS) RWY 5



BAXTER COUNTY (BPK)

RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Flippin altimeter setting: increase LPV DA to 1261 feet, LNAV/VNAV DA to 1310 feet; increase all MDAs 60 feet and visibility LNAV Cat C ½ SM. Baro-VNAV NA when using Flippin altimeter setting. Circling NA for Cat C, SE of Rwy 5-23. Circling Rwy 23 NA at night.

MISSED APPROACH: Climb to 3000 direct PUNTT and hold.

| | | |
|------------------------|--|--|
| ASOS 133.975 | MEMPHIS CENTER 126.85 281.55 | UNICOM 123.0 (CTAF) 0 |
|------------------------|--|--|

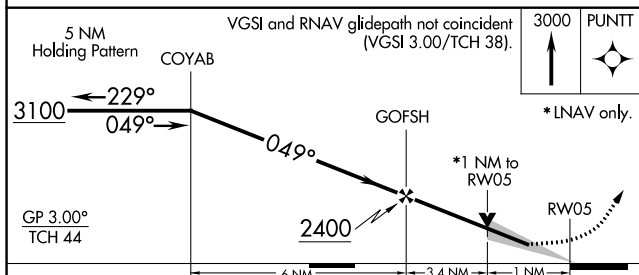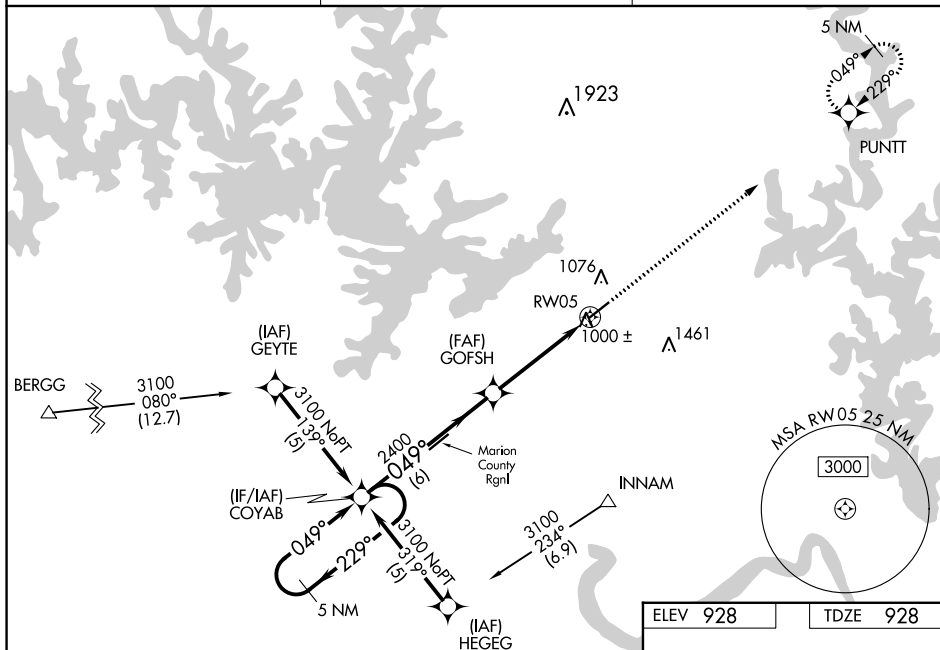

| CATEGORY | A | B | C | D |
|-------------------|---------|--------------|-------------------------|----|
| LPV DA | 1201-1 | 273 (300-1) | | NA |
| LNAV/VNAV DA | 1250-1¼ | 322 (400-1¼) | | NA |
| LNAV MDA | 1280-1 | 352 (400-1) | | NA |
| C CIRCLING | 1400-1 | 472 (500-1) | 1420-1½ 492 (500-1½) | NA |

