

WAAS CH 66028 W27A	APP CRS 274°	Rwy Idg TDZE 777 Apt Elev 781
--	------------------------	---

RNAV (GPS) RWY 27

FULTON COUNTY (USE)


RNP APCH - GPS.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
Circling NA to Rwy 18 and 36. Rwy 27 helicopter visibility reduction below 1 SM NA.
Procedure NA at night.

MISSED APPROACH:
Climb to 3000 direct
DUCZZ and hold.

AWOS-3P 127.375	TOLEDO APP CON 134.35 317.55	UNICOM 123.0 (CTAF) 0
---------------------------	--	---------------------------------

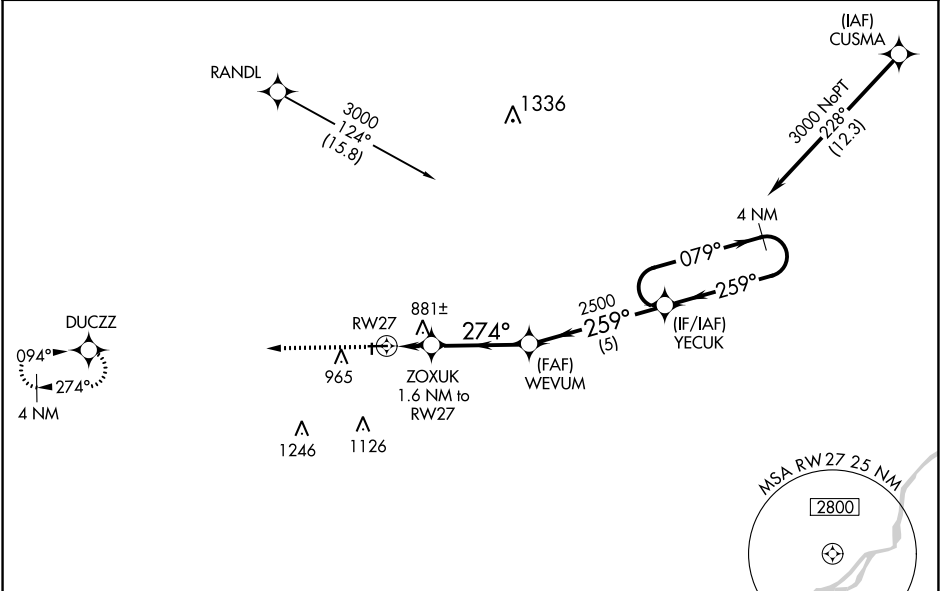

ELEV 781

TDZE 777

3000

DUCZZ

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 33).

*LNAV only

ZOXUK 1.6 NM to RW27

WEVUM 2500

YECUK 4 NM Holding Pattern

079° 3000

259° 2500

GP 3.10° TCH 55

CATEGORY	A	B	C	D
LPV DA	1092-1 315 (400-1)			
LNAV/VNAV DA	1095-1 318 (400-1)			
LNAV MDA	1180-1	403 (400-1)	1180-1½	403 (400-1½)
CIRCLING	1320-1	539 (600-1)	1480-2 699 (700-2)	1480-2¼ 699 (700-2¼)