

WAAS CH <b>50309</b> <b>W22A</b>	APP CRS <b>218°</b>	Rwy Idg <b>5420</b> TDZE <b>161</b> Apt Elev <b>163</b>
--	------------------------	---

## RNAV (GPS) RWY 22

MC MINNVILLE MUNI (MMV)

RNP APCH.


**⚠** Baro-VNAV NA when using Aurora State altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. When local altimeter setting not received, use Aurora State altimeter setting; increase LPV DA to 534 feet, LNAV/VNAV DA to 703 feet; increase all MDAs 60 feet and visibility LNAV Cats C and D ½ SM. For inop ALS, increase LPV all Cats visibility to ½ SM, LNAV/VNAV all Cats to 1 ½ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1 ½ SM. For inop ALS when using Aurora State altimeter setting, increase LNAV/VNAV all Cats visibility to 1 ½ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1 ½ SM. VDP NA when using Aurora State altimeter setting.

MALSR



**MISSED APPROACH:**  
Climb to 4900 direct  
OVUGE then on 218°  
track to PUCIV and hold,  
continue climb-in-hold  
to 4900.

ASOS <b>135.675</b>	PORTLAND APP CON <b>126.0 284.6</b> (NORTH)	SEATTLE CENTER <b>125.8 291.7</b> (SOUTH)	CLNC DEL <b>118.35</b>	UNICOM <b>123.0</b> (CTAF) <b>0</b>
------------------------	--	--	---------------------------	--

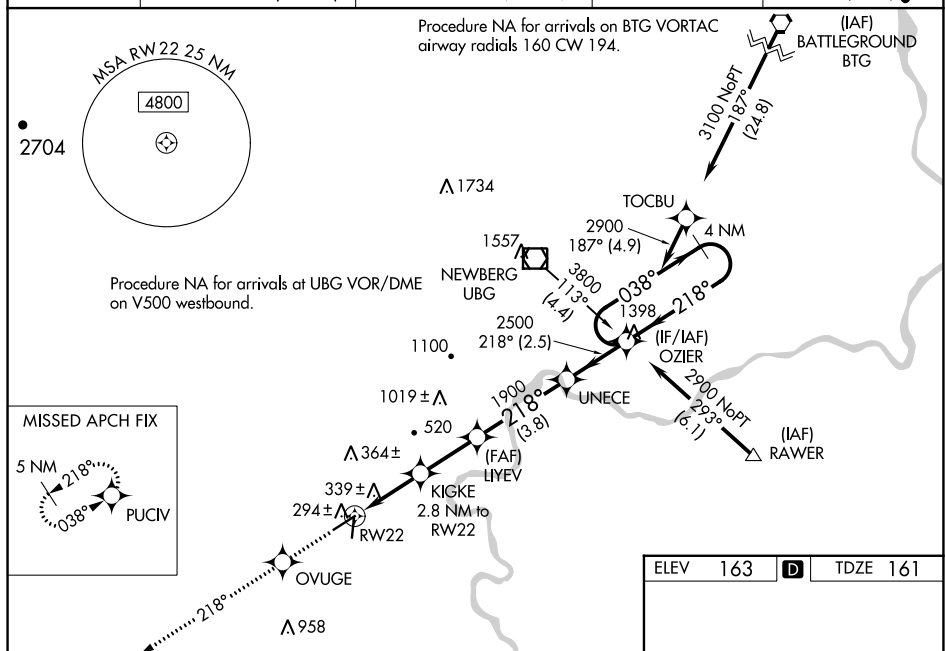

ELEV	163	<b>D</b>	TDZE	161
------	-----	----------	------	-----

