




# RNAV (GPS) RWY 3


## SAN ANGELO RGNL/MATHIS FLD (SJT)

 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C.  
 For inop ALS, increase LPV Cat E visibility to RVR 4000, and LNAV/VNAV Cat E and LNAV Cat E visibility to RVR 6000. Circling NA for Cat E west of Rwy 18-36.  
 # RVR 1800 authorized with use of FD or AP or HUD to DA.




**MISSED APPROACH:**  
Climb to 3800 direct  
LITAZ and hold.

ATIS 128.45 319.0	SAN ANGELO APP CON ★ 125.35 354.1	MATHIS TOWER ★ 118.3(CTAF) 284.7	GND CON 121.9 348.6	UNICOM 122.95
----------------------	--------------------------------------	-------------------------------------	------------------------	------------------

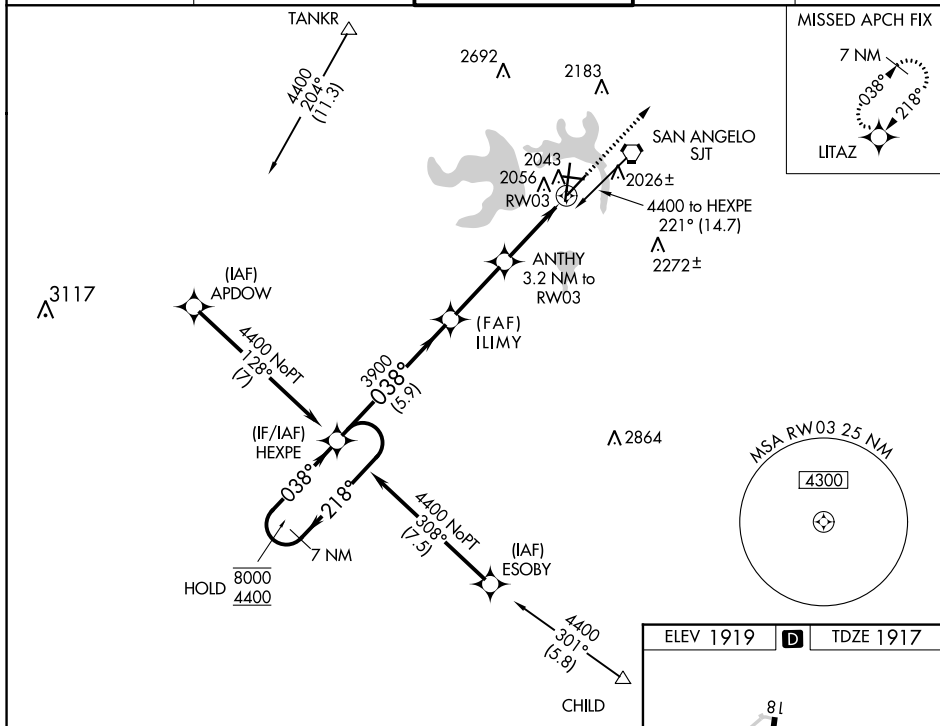

**RNAV Approach Procedure Summary:**

CATEGORY	A	B	C	D	E
LPV DA #	2117/24		200 (200-½)		
LNAV/VNAV DA	2323/35		406 (500-⅝)		
LNAV MDA	2300/24 383 (400-½)		2300/35 383 (400-⅝)		
<b>C</b> CIRCLING	2360-1 441 (500-1)	2380-1 461 (500-1)	2500-1½ 581 (600-1½)	2700-2½ 781 (800-2½)	2700-2¾ 781 (800-2¾)

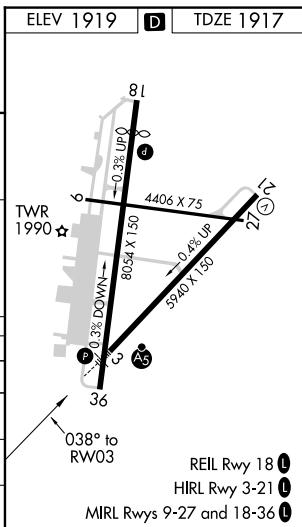

SC-3, 13 JUL 2023 to 10 AUG 2023