SW-3, 13 JUL 2023 to 10 AUG 2023


4501 WAAS Rwy Idg APP CRS TDŹE 413 CH 82517 120° Apt Elev 425 W12A

RNAV (GPS) RWY 12

SHAFTER-MINTER FLD (MIT)

Baro-VNAV NA when using Bakersfield altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Bakersfield altimeter setting and increase LPV and LNAV/VNAV DA to 694 feet and LNAV/VNAV visibility to % all Cats; increase all MDA 40 feet. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct TIPVE and on track 199° to MARIC and hold.

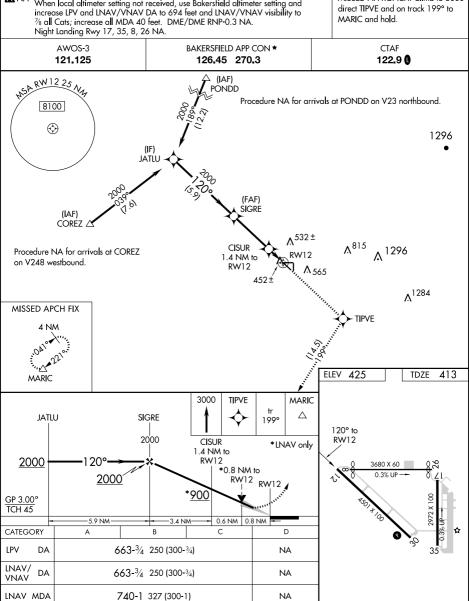

SHAFTER, CALIFORNIA

900-1 475 (500-1)

Amdt 1B 30DEC21

CIRCLING

SHAFTER-MINTER FLD (MIT) RNAV (GPS) RWY 12

MIRL Rwy 12-30 (

REIL Rwys 12 and 30 0

NA

940-11/2

515 (600-11/2)