

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 57903 W08A | APP CRS 083° | Rwy Idg TDZE Apt Elev | 5102 3260 3279 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 8

SEARLE FLD (OGA)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Imperial altimeter setting and increase all DA 86 feet and all MDA 100 feet, increase LPV all Cats visibility 1/8 SM, LNAV/VNAV all Cats and Circling Cat B visibility 1/4 SM. Baro-VNAV NA when using Imperial altimeter setting.

MISSED APPROACH:
Climb to 5200 direct TUKWY and hold.

| | | |
|--------------------------|--------------------------------------|---------------------------------|
| AWOS-3 121.275 | DENVER CENTER 132.7 397.85 | UNICOM 122.8 (CTAF) 0 |
|--------------------------|--------------------------------------|---------------------------------|

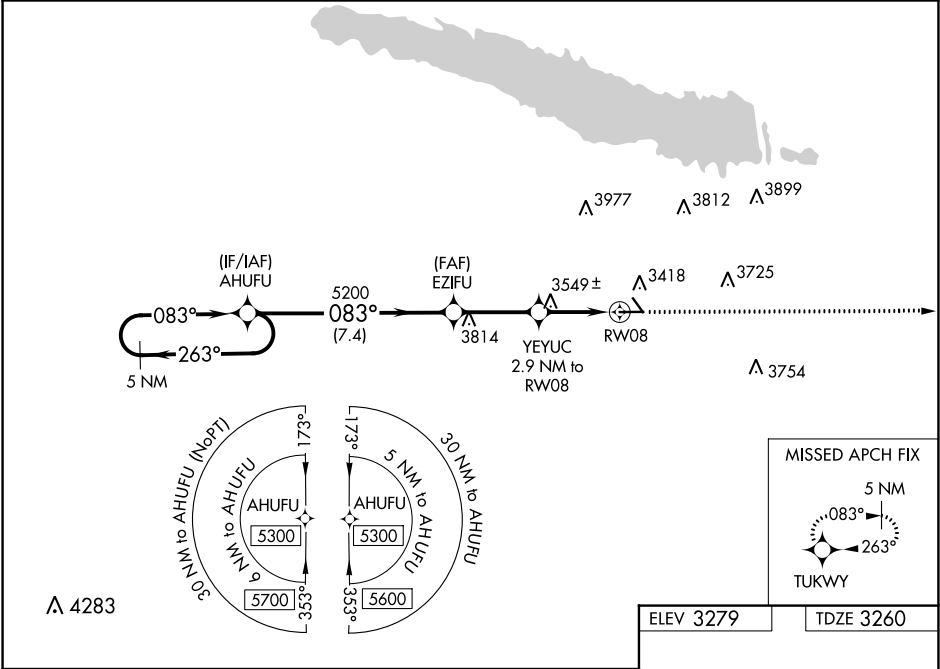

| | | | | | |
|----------------------|-----------------------|-----------------------|----|----------------------|--|
| 5 NM Holding Pattern | | AHUFU | | 5200 TUKWY | |
| 5300 | | 5200 | | YEYUC 2.9 NM to RW08 | |
| GP 3.00° | | 5200 | | RW08 | |
| TCH 40 | | 7.4 NM | | 3.1 NM | |
| | | | | 2.9 NM | |
| CATEGORY | A | B | C | D | |
| LPV DA | 3510-1 | 250 (300-1) | NA | | |
| LNAV/VNAV DA | 3865-2¼ | 605 (600-2¼) | NA | | |
| LNAV MDA | 3800-1 | 540 (600-1) | NA | | |
| CIRCLING | 3940-1 661 (700-1) | 4000-1 721 (800-1) | NA | | |