

WAAS
CH **61041**
W23A

APP CRS
229°


Rwy Idg
TDZE
Apt Elev

5200
15
15

RNAV (GPS) RWY 23

LAKE CHARLES RGNL (LCH)

RNP APCH - GPS.			MISSED APPROACH: Climb to 1700 direct WINUP and hold.		
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. Rwy 23 helicopter visibility reduction below ¾ SM NA.					
ATIS 118.75	LAKE CHARLES APP CON * 119.35 353.75	LAKE CHARLES TOWER * 120.7 (CTAF) 257.8	GND CON 121.8	CLNC DEL 126.25	UNICOM 122.95

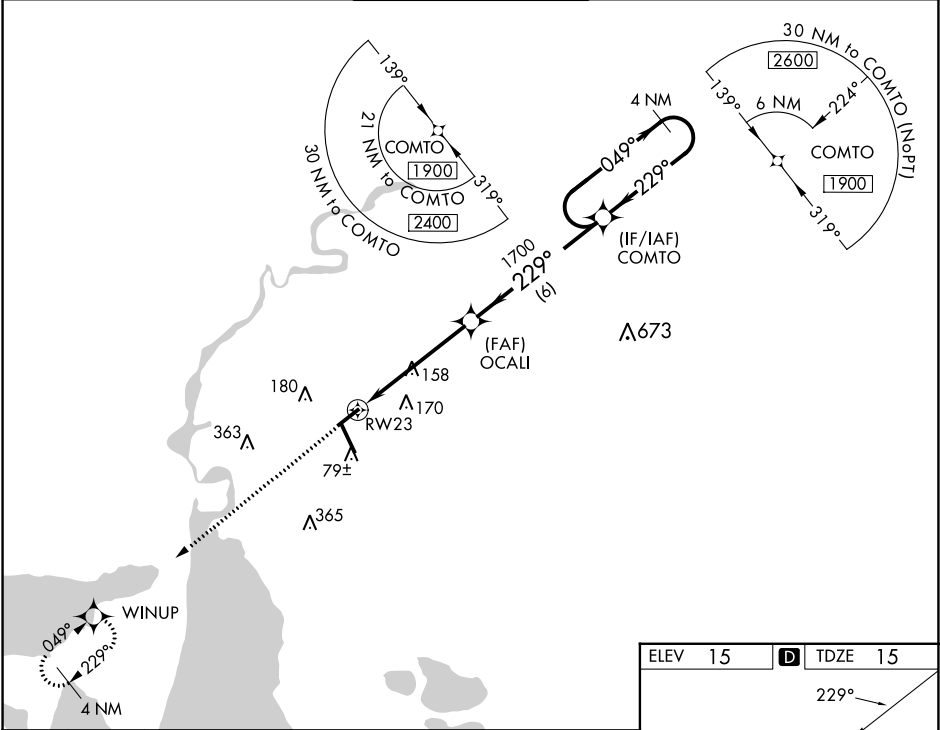

1700		WINUP			
1.1 NM to RWY 23		OCALI		COMTO	
1.1		4 NM		6 NM	
CATEGORY	A	B	C	D	
LPV DA	265-¾		250 (300-¾)		
LNAV/VNAV DA	301-⅞		286 (300-⅞)		
LNAV MDA	420-1 405 (500-1)		420-1½ 405 (500-1½)		
CIRCLING	440-1 425 (500-1)		480-1 465 (500-1)		
	580-1½ 565 (600-1½)		680-2 665 (700-2)		

