

WAAS CH <b>99328</b> <b>W30A</b>	APP CRS <b>295°</b>	Rwy Idg TDZE <b>958</b> Apt Elev <b>961</b>
--	------------------------	---

RNAV (GPS) RWY 30

AIRLAKE (LVN)

RNP APCH.

▼


▲

Baro-VNAV and VDP NA when using Minneapolis-St Paul Intl/Wold-Chamberlain altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 37°C. When local altimeter setting not received, use Minneapolis-St Paul Intl/Wold-Chamberlain altimeter setting: increase LPV DA to 1210 feet; increase LNAV/VNAV DA to 1298; increase all MDAs 60 feet. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV all Cats visibility to 1 SM. For inop ALS when using Minneapolis-St Paul Intl/Wold-Chamberlain altimeter setting, increase LNAV/VNAV all Cats visibility to 1, and LNAV Cat A/B to 1. Inoperative table does not apply to LPV. Rwy 30 helicopter visibility reduction below ¾ SM NA. When Circling to Rwy 12 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MALSR

MISSED APPROACH:  
Climb to 3000 direct  
JUNTU and hold.

AWOS-3 <b>118.0</b>	MINNEAPOLIS APP CON <b>134.7 284.7</b>	CLNC DEL <b>118.95</b>	UNICOM <b>123.0 (CTAF) 0</b>
------------------------	---	---------------------------	---------------------------------

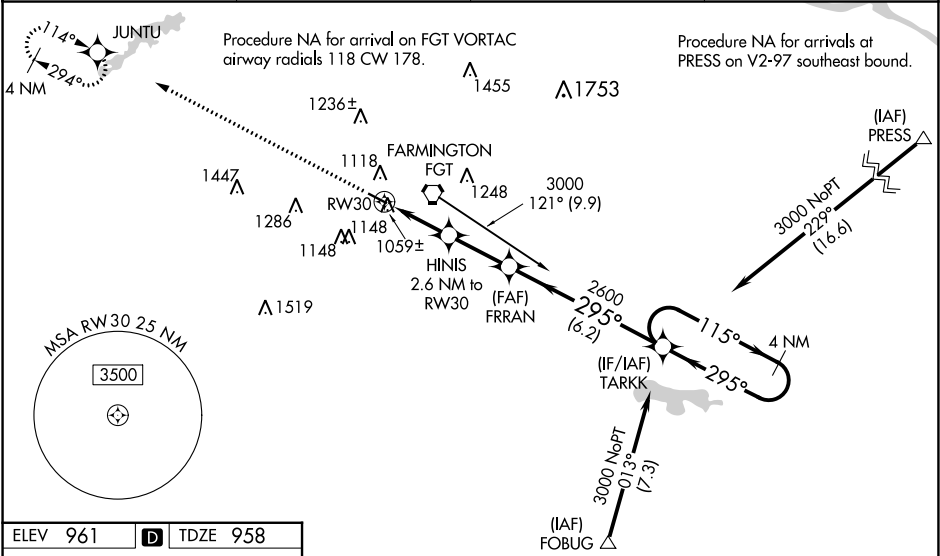

ELEV 961	<b>D</b>	TDZE 958
----------	----------	----------

3000

JUNTU

VGSI and RNAV glidepath not coincident  
(VGSI Angle 3.00/TCH 36).

\*LNAV only

RW30

HINIS  
2.6 NM to  
RW30

FRRAN  
2600

TARKK  
4 NM  
Holding Pattern

1820\*

295°

2600

115°

3000

GP 3.00°  
TCH 45

1 NM

1.6 NM

2.4 NM

6.2 NM

CATEGORY	A	B	C	D
LPV DA		1158-¾	200 (200-¾)	
LNAV/VNAV DA		1246-¾	288 (300-¾)	
LNAV MDA		1320-¾	362 (400-¾)	
CIRCLING	1460-1	499 (500-1)	1660-2 699 (700-2)	1700-2¼ 739 (800-2¼)

REIL Rwy 12 0

HIRL Rwy 12-30 0

4099 X 75

295° to RW30

NC-1, 13 JUL 2023 to 10 AUG 2023

NC-1, 13 JUL 2023 to 10 AUG 2023