WAAS CH 50319 W27A	APP CRS 271°	Rwy ldg 6002 TDZE 13 Apt Elev 13

RNAV (GPS) RWY 27
FORT LAUDERDALE EXEC (FXE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C (40°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Lauderdale/Hollywood Intl altimeter setting and increase LPV DA to 414; LNAV/VNAV DA to 468. Increase all MDA 20 feet and increase LPV all Cats and LNAV Cats C/D visibility to 1⅜. Baro-VNAV and VDP NA when using Fort Lauderdale/Hollywood Intl altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct ENVER and hold.

ATIS	MIAMI APP CON	EXECUTIVE TOWER	GND CON	CLNC DEL
119.85	119.7 306.3	120.9 239.3	121.75	127.95

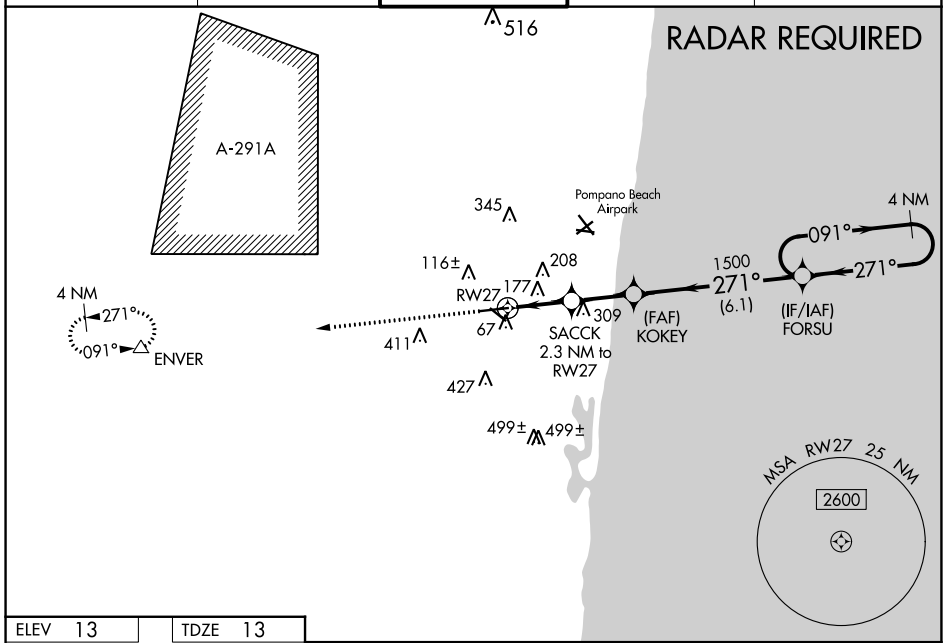

ELEV 13	TDZE 13



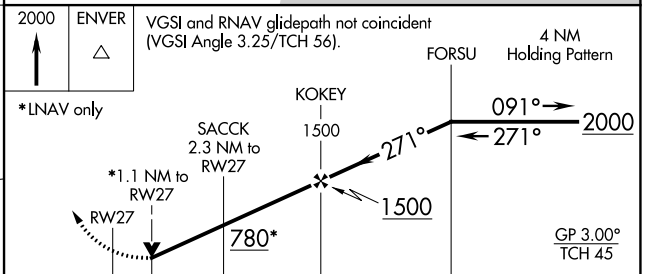

CATEGORY	A	B	C	D
LPV DA	396-1¼ 383 (400-1¼)			
LNAV/VNAV DA	450-1½ 437 (500-1½)			
LNAV MDA	440-1 427 (500-1)		440-1¼ 427 (500-1¼)	
C CIRCLING	520-1 507 (600-1)	620-1 607 (700-1)	780-2¼ 767 (800-2¼)	780-2½ 767 (800-2½)

HIRL Rwy 9-27
MIRL Rwy 13-31
REIL Rwys 13, 27 and 31

SE-3, 13 JUL 2023 to 10 AUG 2023

SE-3, 13 JUL 2023 to 10 AUG 2023