Δ

NW-1, 13 JUL 2023 to

10 AUG 2023


RNAV (GPS) RWY 16

KEMMERER MUNI (EMM)

Baro-VNAV NA when using Evanston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA when using Evanston altimeter setting. Night landing: Rwy 4, 10, 22, 28 NA. When local altimeter setting not received, use Evanston altimeter setting: Increase all DA 111 feet and visibilities 4 mile; increase all MDA 120 feet

MISSED APPROACH: Climb to 10000 direct ILUME and hold.

AWOS-3PT SALT LAKE CITY CENTER **UNICOM** 122.8 (CTAF) 0 * 119,675 124.35 353.5 MIKAE

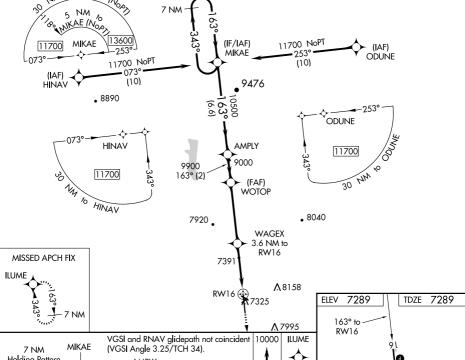

4301	7 NM				į	
71115					įΛ	7995
75.114			RNAV glide _l le 3.25/TCH	path not coinci	dent 10000	ILUME
Holding Pattern		AM	PLY	1 34). ITOP	1	\
11700 < 34 163°−	3° 163	٥,	99	WA000 3.6 N	IM to	NAV only.
		0500		RW X-	16 *1 NM RW1	
GP 3.00° TCH 34			9900	*8480	7	RW16
	6.61			4.5 NM	2.6 NM1	NM -
CATEGORY	A		В	C D		D
LPV DA	7539-1	250 (30	0-1)	NA		
LNAV/ VNAV DA	7539-1 250 (300-1)			NA		
LNAV MDA	7660-1 371 (400-1)			NA		
CIRCLING	7660-1 371 (400-1)		40-1½ 1000-1½)	NA		

REIL Rwys 16 and 34 1 MIRL Rwys 16-34 and 4-22 0

KEMMERER, WYOMING Amdt 2 08JAN15

KEMMERER MUNI (EMM)