

D-ATIS	124.75	125.625
CLINC DEL	127.3	379.975
CPDLC		
GND CON	121.9	348.6 (Rw)
	123.775	348.6 (Rw)
SALT LAKE CITY TD	119.05	257.8 (Rw)
	118.3	257.8 (Rw)
SALT LAKE CITY D	132.65	336.4 (Rw)
	135.5	316.15

**RNAV 1 - DME/DME/IRU or GPS.
RADAR required.**

TOP ALTITUDE:
FL230


TAKEOFF MINIMUMS

Rwys 14, 32: NA-ATC.

Rwyw 16L: Standard with minimum climb of 470' per NM to 9900.
 Rwyw 16R: Standard with minimum climb of 500' per NM to 9700.
 Rwyw 17: Standard with minimum climb of 425' per NM to 9400.
 Rwyw 34L: Standard with minimum climb of 250' per NM to 8500.
 Rwyw 34R: Standard with minimum climb of 310' per NM to 11500.
 Rwyw 35: Standard with minimum climb of 305' per NM to 11500.

NOTE: Turbojet aircraft only.

NOTE: Aircraft landing Denver Intl Airport, file the PERTY Transition.

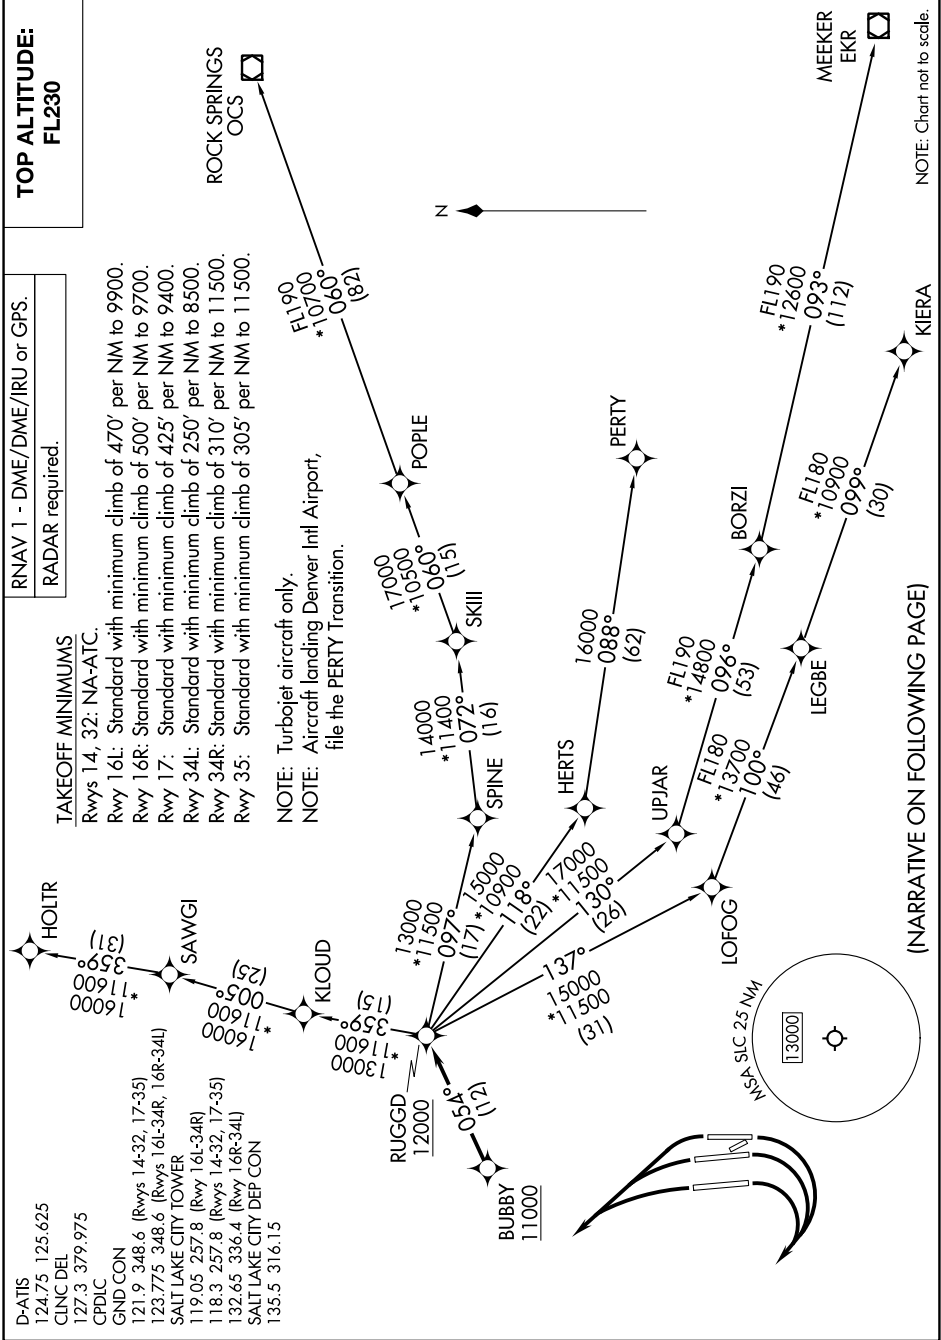

RUGGD THREE DEPARTURE (RNAV)

(RUGGD3.RUGGD) 20APR23

SALT LAKE CITY, UTAH
SALT LAKE CITY INTL (SLC)