

APP CRS	Rwy Idg	6300
190°	TDZE	6451
	Apt Elev	6451

RNAV (RNP) X RWY 19

JACKSON HOLE (JAC)


RNP AR APCH-GPS.

For uncompensated Baro-VNAV systems, procedure NA below -27°C or above 54°C. For inop ALS, increase RNP 0.20# all Cats visibility to RVR 6000. For inop ALS, increase RNP 0.30 all Cats visibility to 1 1/4 SM.

MALS

MISSED APPROACH: Climb to 14000 on track 190° to HIPUL and on track 193° to KICNE and hold, continue climb-in-hold to 14000. *Missed approach requires minimum climb of 226 feet per NM to 11600. #Missed approach requires minimum climb of 215 feet per NM to 11600.

D-ATIS	SALT LAKE CENTER	JACKSON TOWER★	GND CON	UNICOM
120.625	133.25 285.6	118.075 (CTAF) 0	124.55	122.95

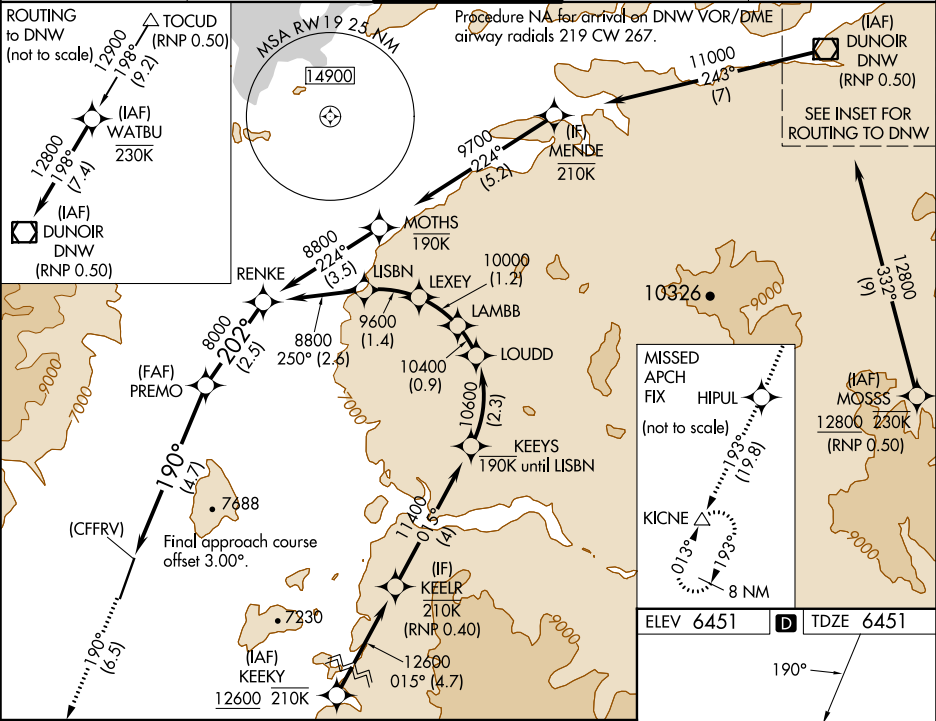

14000	HIPUL	tr 190°	KICNE	tr 193°
See planview for multiple IF locations.				
(CFFRV)				
4.7 NM				
2.5 NM				
CATEGORY	A	B	C	D
RNP 0.10 DA*	6777/40 326 (400-3/4)			
RNP 0.20 DA#	6856/50 405 (500-1)			
RNP 0.30 DA#	6938/60 487 (500-1 1/4)			
RNP 0.30 DA	7045-1 3/8 594 (600-1 3/8)			

ELEV 6451 D TDZE 6451

190°

TWR 6506

0.6% Up

6300 X 150

CL Rwy 1-19 0

HIRL Rwy 1-19 0

AUTHORIZATION REQUIRED

NW-1, 13 JUL 2023 to 10 AUG 2023

NW-1, 13 JUL 2023 to 10 AUG 2023