








WAAS CH <b>97635</b> <b>W05A</b>	APP CRS <b>049°</b>	Rwy Idg <b>6005</b> TDZE <b>40</b> Apt Elev <b>40</b>
--	------------------------	---

RNAV (GPS) RWY 5  
GEORGETOWN COUNTY (GGE)

RNP APCH.			 ODALS	MISSED APPROACH: Climb to 2000 direct OTVOE and hold.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 5 helicopter visibility reduction below ¼ SM NA.  For inop ALS, increase LNAV/VNAV visibility Cats A/B to ½ SM. Inop table does not apply to LPV all Cats. Circling Rwy 11, 29 NA at night.				
AWOS-3 <b>118.275</b>	MYRTLE BEACH APP CON ★ <b>127.4 257.95</b>	GCO <b>121.725</b>	UNICOM <b>123.0 (CTAF)</b> 	

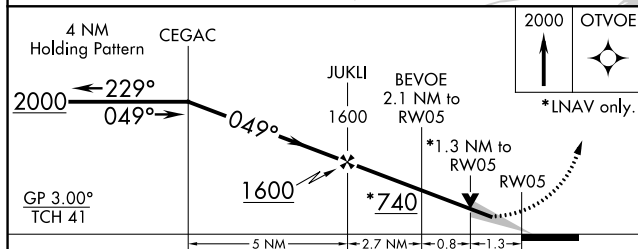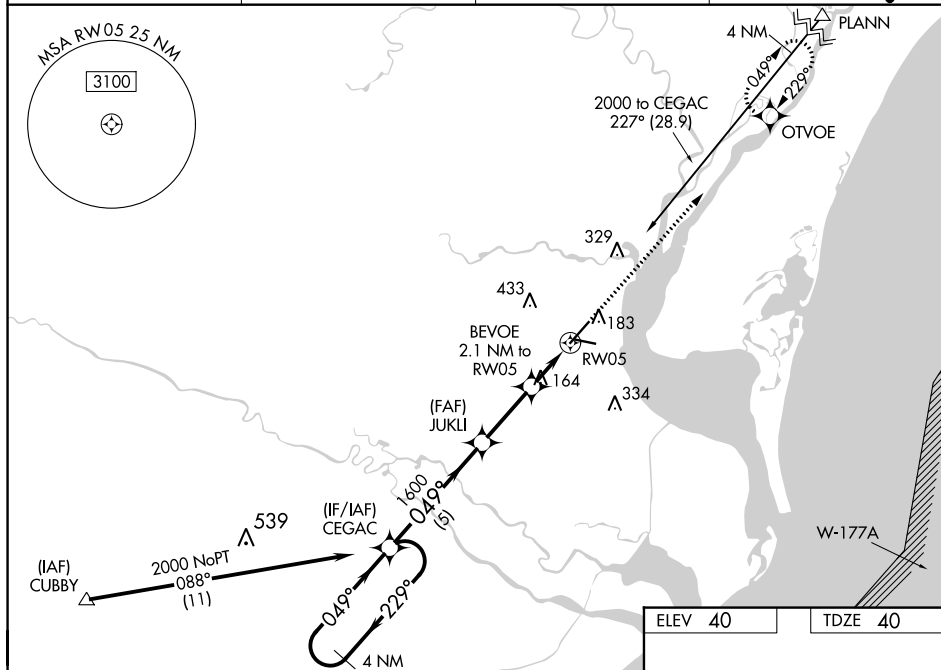

CATEGORY	A	B	C	D
LPV DA	290- <sup>3</sup> / <sub>4</sub> 250 (300- <sup>3</sup> / <sub>4</sub> )			
LNAV/VNAV DA	304- <sup>3</sup> / <sub>4</sub> 264 (300- <sup>3</sup> / <sub>4</sub> )			
LNAV MDA	480- <sup>3</sup> / <sub>4</sub> 440 (500- <sup>3</sup> / <sub>4</sub> )		480-1 <sup>1</sup> / <sub>8</sub> 440 (500-1 <sup>1</sup> / <sub>8</sub> )	
 CIRCLING	500-1 460 (500-1)	520-1 480 (500-1)	740-2 700 (700-2)	740-2 <sup>1</sup> / <sub>4</sub> 700 (700-2 <sup>1</sup> / <sub>4</sub> )

