

WAAS CH 97423 W06A	APP CRS 064°	Rwy Idg TDZE Apt Elev	5301 822 823
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

MEXICO MEML (MYJ)

RNP APCH - GPS.


▼

▲ NA

Baro-VNAV and VDP NA when using Columbia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Columbia altimeter setting: increase LPV DA to 1146 feet and visibilities ¼ SM; increase LNAV/VNAV DA to 1167 feet and visibilities ⅓ SM; increase all MDAs 80 feet and LNAV visibility Cat C ⅓ SM and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 3000 direct HAPTO and hold.

AWOS-3PT 120.575	MIZZU APP CON 124.375	CTAF 122.9 0
----------------------------	---------------------------------	------------------------

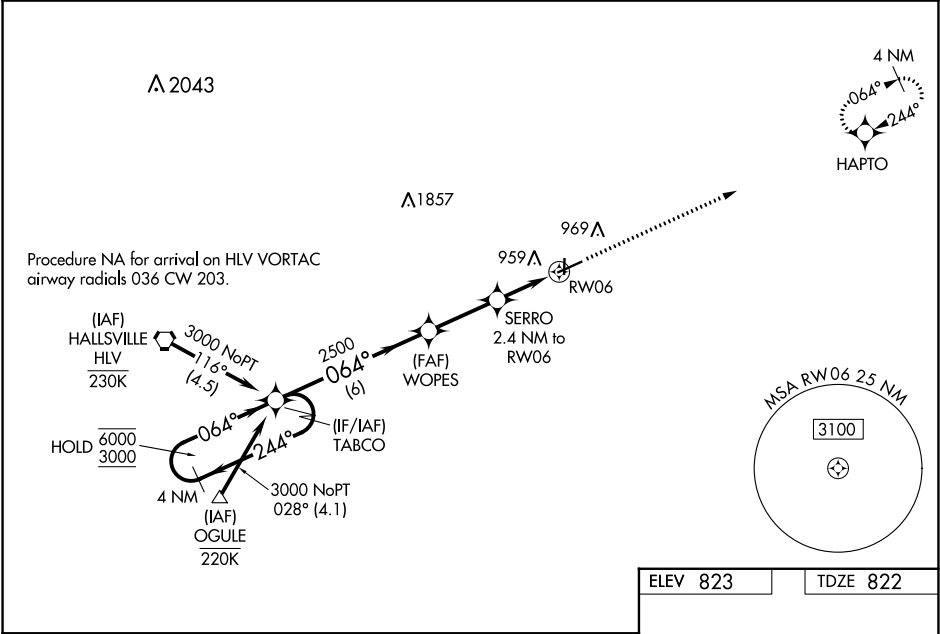

4 NM Holding Pattern

TABCO

WOPES

SERRO

2.4 NM to RW06

1.1 NM to RW06

RW06

3000

HAPTO

6000

3000

GP 3.00°

TCH 40

2500

1640

6 NM

2.7 NM

1.4 NM

1.1 NM

CATEGORY

A

B

C

D

LPV DA

1072-¾

250 (300-¾)

NA

LNAV/VNAV DA

1093-⅞

271 (300-⅞)

NA

LNAV MDA

1200-1

378 (400-1)

NA

CIRCLING

1280-1

457 (500-1)

1420-1½

597 (600-1½)

NA

REIL Rwy 18 0

MIRL Rwy 6-24 and 18-36 0