

APP CRS
100°

Rwy ldg
TDZE
201

Apt Elev
201

RNAV (GPS) RWY 10


LAKE CITY GATEWAY (LCQ)

RNP APCH-GPS.

When local altimeter setting not received, use Gainesville altimeter setting: Increase all MDAs 100 feet; increase LNAV Cat C/D visibility 3⁄8 SM and Circling Cat C visibility 1⁄2 SM and Cat D 1⁄4 SM. Procedure NA at night. Rwy 10 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct DREBL and hold.

AWOS-3 120,675	JACKSONVILLE CENTER 125,375 254,325	LAKE CITY TOWER ★ 119.2 (CTAF) 0 314.6	GND CON 121.9	UNICOM 122.95
-------------------	--	---	------------------	------------------

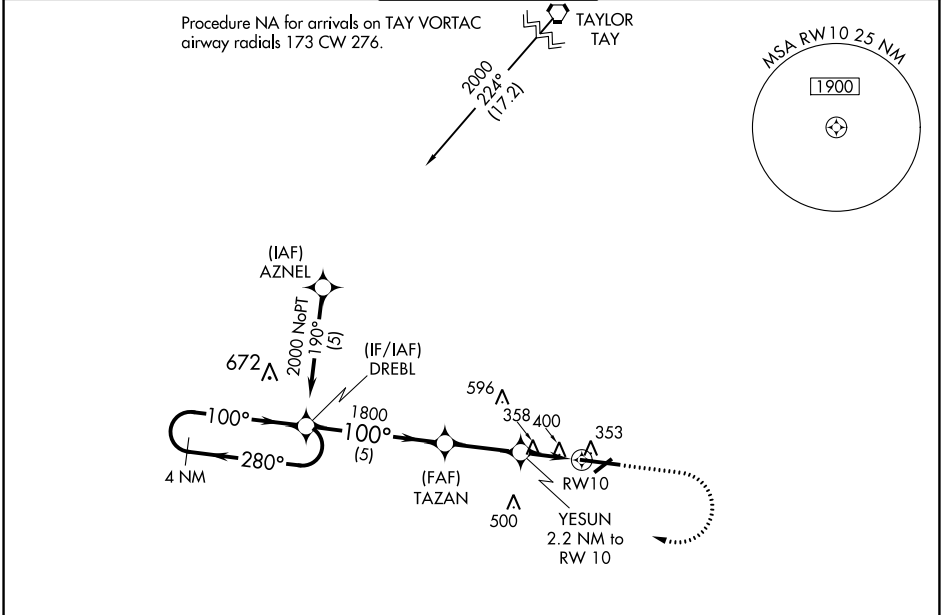

ELEV 201

TDZE 201

100° to RW 10

TWR

8003 X 150

4000 X 75

28

4 NM Holding Pattern

DREBL

800

2000

DREBL

100°

100°

100°

1800

2.96° TCH 53

YESUN 2.2 NM to RW 10

940

RW 10

5 NM

2.7 NM

2.2 NM

CATEGORY	A	B	C	D
LNAV MDA	700-1	499 (500-1)	700-1 3⁄8	499 (500-1 3⁄8)
CIRCLING	760-1	559 (600-1)	780-1 1⁄2 579 (600-1 1⁄2)	960-2 1⁄2 759 (800-2 1⁄2)

REIL Rwy 10 and 28 0
MIRL Rwy 5-23 and 10-28 0