

WAAS CH 42639 W35A	APP CRS 354°	Rwy Idg 4400 TDZE 1689 Apt Elev 1692
--	------------------------	---

RNAV (GPS) RWY 35




RNP APCH.

T Baro-VNAV and VDP NA when using Hutchinson altimeter setting. For uncompensated
A Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Circling Rwy
17 NA at night. When local altimeter setting not received, use Hutchinson altimeter setting.

MISSED APPROACH:
Climb to 3400 direct
PAPDY and hold.

AWOS-3P 119.925	KANSAS CITY CENTER 118.8 322.425	UNICOM 122.8 (CTAF) ①
---------------------------	--	---------------------------------


MISSED APCH FIX

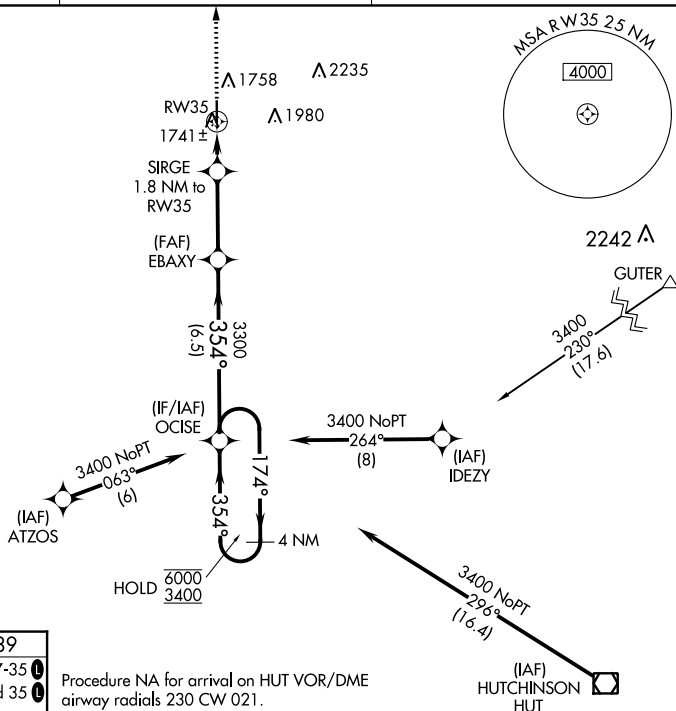


ELEV 1692	TDZE 1689
-----------	-----------

MIRL Rwy 17-35 **L**
REIL Rwy 17 and 35 **L**

Procedure NA for arrival on HUT VOR/DME
airway radials 230 CW 021.

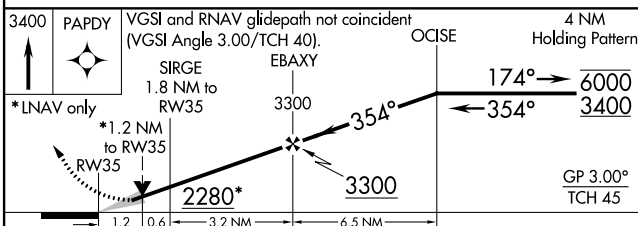

CATEGORY		A	B	C	D
LPV	DA	2016-1½	327 (400-1½)	NA	
LNAV/ VNAV	DA	2016-1½	327 (400-1½)	NA	
LNAV	MDA	2080-1	391 (400-1)	NA	
 CIRCLING		2260-1	568 (600-1)	NA	