WAAS CH **82518** **W35A**	APP CRS **354°**	Rwy ldg **3898** TDZE **822** Apt Elev **825**

RNAV (GPS) RWY 35
HUTSON FLD (GAF)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Grand Forks Intl altimeter setting: increase LPV DA to 1141 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1268 feet and all visibilities ¼ SM; increase all MDA's 80 feet and visibility circling Cat C ¼ SM. Baro-VNAV NA when using Grand Forks Intl altimeter setting. Circling NA to Rwys 8 and 26.

NA

MISSED APPROACH: Climb to 4000 direct OHUTO and hold, continue climb-in-hold to 4000.

AWOS-3	GRAND FORKS APP CON★	UNICOM
118.625	**118.1 318.1**	**122.8** (CTAF) L

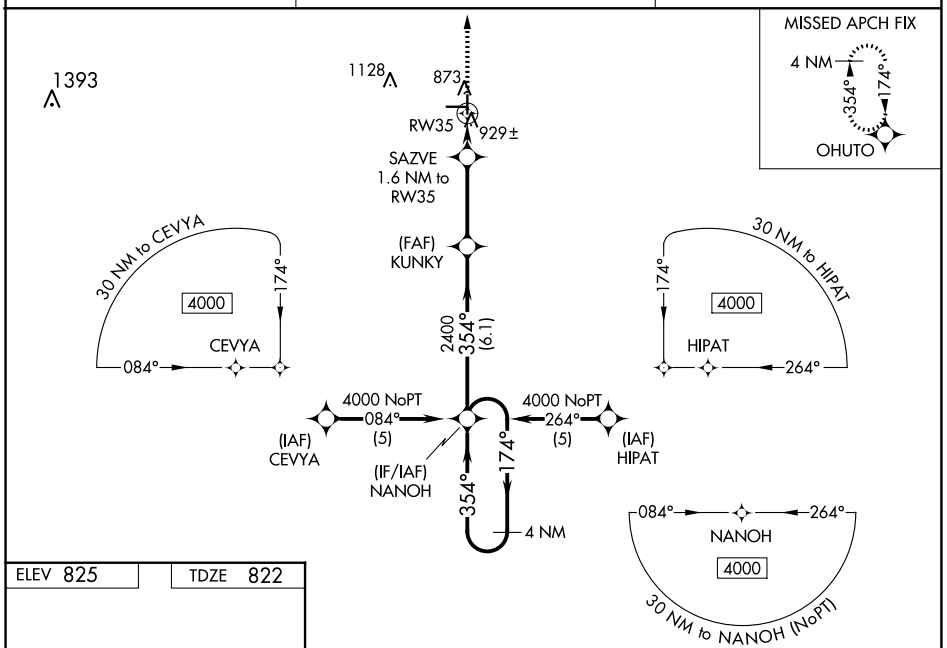

ELEV 825 TDZE 822

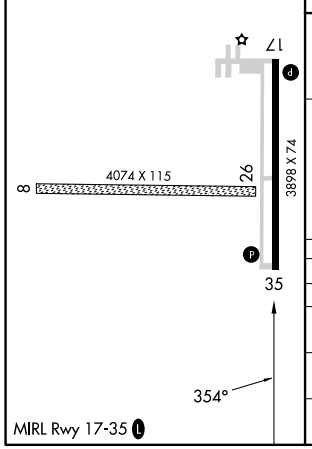

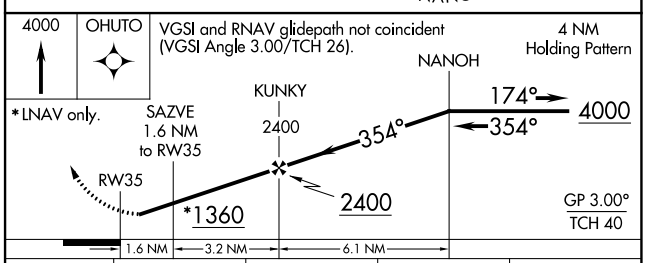

CATEGORY	A	B	C	D
LPV DA	1072-1 250 (300-1)			NA
LNAV/VNAV DA	1199-1¼ 377 (400-1¼)			NA
LNAV MDA	1180-1 358 (400-1)			NA
CIRCLING	1340-1 515 (600-1)		1440-1¾ 615 (700-1¾)	NA

NC-1, 13 JUL 2023 to 10 AUG 2023