


WAAS CH 82533 W21A	APP CRS 219°	Rwy Idg 4000 TDZE 963 Apt Elev 963
--	------------------------	---

RNAV (GPS) RWY 21
WAYNE COUNTY (EKG)

T Baro-VNAV NA when using Somerset altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Somerset altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Somerset altimeter setting and increase all DA 44 feet, and all MDA 60 feet; increase LPV all Cnts visibility ½ mile and LNAV/VNAV all Cnts visibility ½ mile. Night landing: Rwy 3 NA.

MISSED APPROACH:
Climb to 4000 direct
UNNOG and hold.

AWOS-3PT 118.825	INDIANAPOLIS CENTER 124.625 371.925	UNICOM 122.8 (CTAF) ①
----------------------------	---	---------------------------------

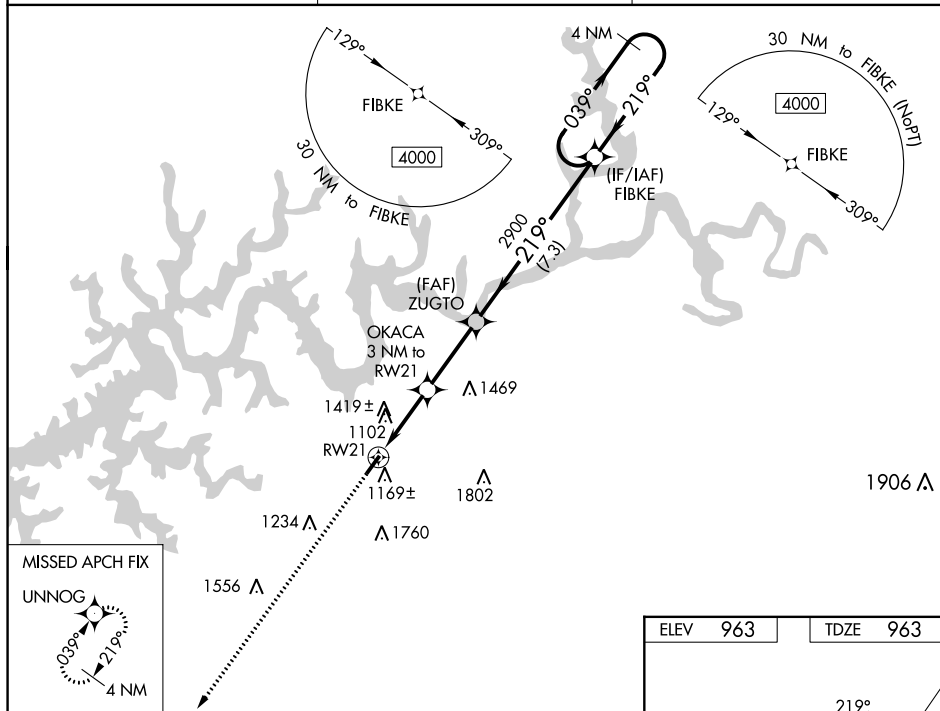

The diagram illustrates the OKACA holding pattern. It shows a series of turns around a fix at 2900. Key points include RW21 (1.8 NM from start), ZUGTO (2900), FIBKE, and OKACA (3 NM from RW21). The pattern includes a 4 NM Holding Pattern segment. Altitudes are indicated as 1940* and 2900. A GP 3.00° TCH 40 is also shown.

