| WAAS CH 90540 W23A | APP CRS 231° | Rwy ldg 6002<br>TDZE 754<br>Apt Elev 782 |
|---|---|---|

# RNAV (GPS) RWY 23
## ANDERSON RGNL (AND)

RNP APCH - GPS.

Circling Rwy 17, 35 NA at night. Baro-VNAV and VDP NA when using Clemson altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. When local altimeter setting not received, use Clemson altimeter setting and increase LPV DA to 1149 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1267 feet; increase all MDAs 60 feet and visibility LNAV Cats C/D and Circling Cats C/D ¼ SM.

MISSED APPROACH: Climb to 2500 direct OYUNA and hold.

| ASOS | GREER APP CON ★ | CTAF |
|---|---|---|
| 120.675 | 118.8 270.275 | 123.6 L |

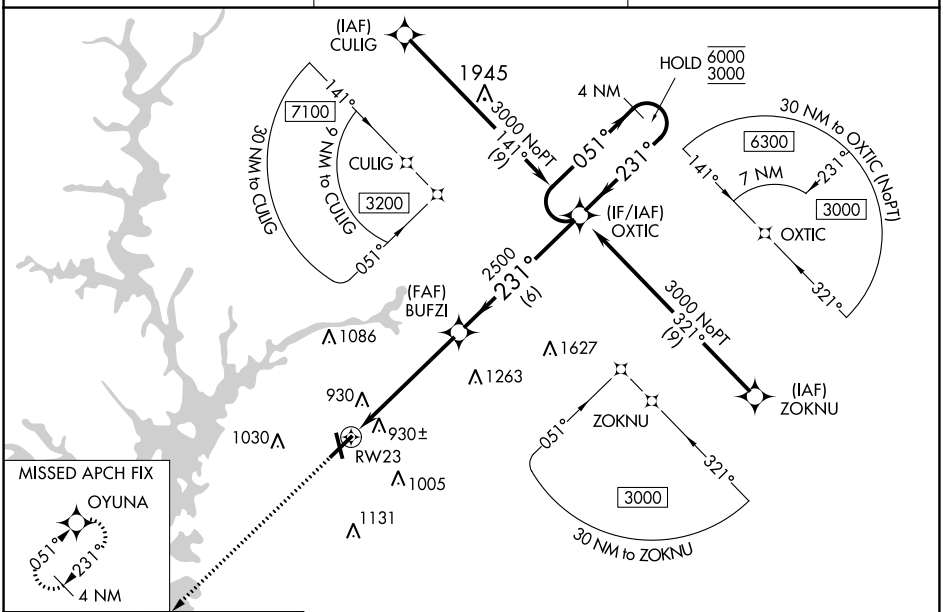


ELEV 782 TDZE 754

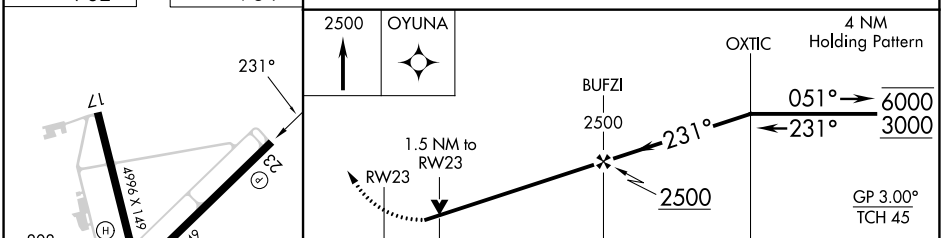


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1102-1 348 (400-1) | | | |
| LNAV/VNAV DA | 1220-1⅜ 466 (500-1⅜) | | | |
| LNAV MDA | 1280-1 526 (500-1) | | 1280-1½ 526 (500-1½) | |
| C CIRCLING | 1280-1 498 (500-1) | 1320-1 538 (600-1) | 1440-1¾ 658 (700-1¾) | 1500-2¼ 718 (800-2¼) |

HIRL Rwy 5-23 L



SE-2, 13 JUL 2023 to 10 AUG 2023
SE-2, 13 JUL 2023 to 10 AUG 2023