

APP CRS
056°

Rwy Idg
TDZE
365
Apt Elev
365

RNAV (GPS) RWY 5
BEAVER (WBQ)(PAWB)

RNP APCH-GPS.

▼

NA


Rwy 5 helicopter visibility reduction below 3/4 SM NA.
Use Fort Yukon altimeter setting.

MISSED APPROACH: Climb to 3000 direct DUTKE and hold.

FYU/PFYU AWOS-3P
125.8

FAIRBANKS RADIO
122.05 122.15

CTAF
122.9 0

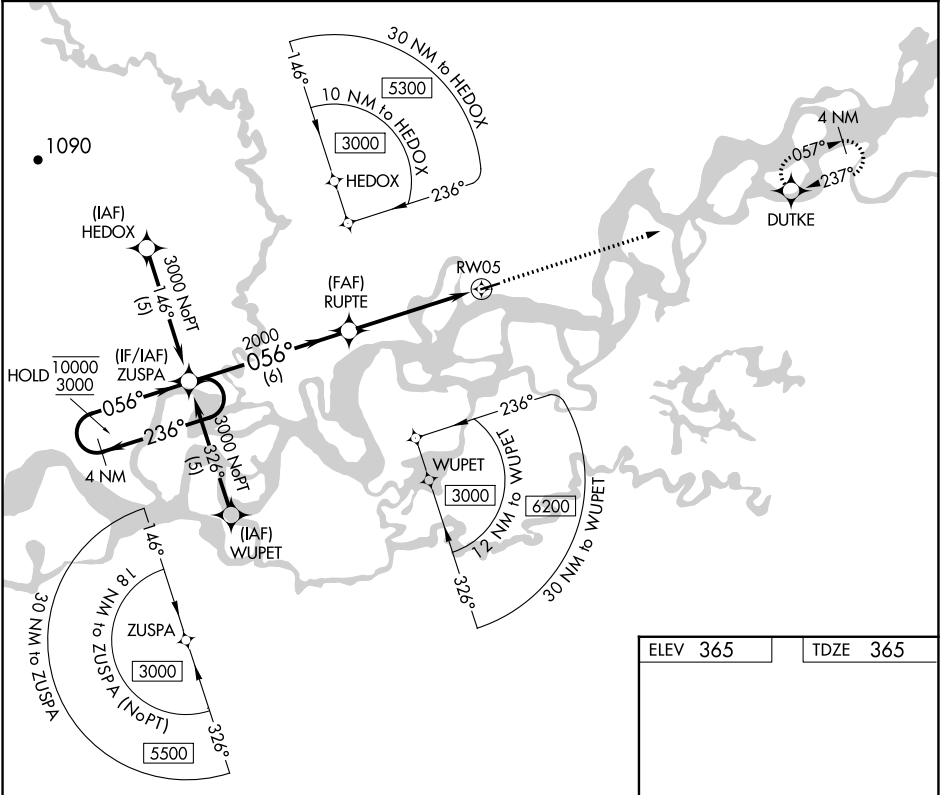

4 NM Holding Pattern

ZUSPA

10000
3000

236°

056°

056°

RUPT

3000

DUTKE

3.03°

TCH 40

2000

RW05

6 NM

5 NM

3934 X 75

422

056° to RW05

CATEGORY	A	B	C	D
LNNAV MDA	940-1	575 (600-1)	940-1 3/8 575 (600-1 3/8)	NA
CIRCLING	940-1	575 (600-1)	940-1 1/2 575 (600-1 1/2)	NA

MIRL Rwy 5-23 0