

APP CRS
267°

Rwy Idg
TDZE
Apt Elev

9000
96
96

RNAV (RNP) Y RWY 26R

GEORGE BUSH INTCNL/HOUSTON (IAH)

▼


For uncompensated Baro-VNAV systems, procedure NA below -3°C (27°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 5000 and increase RNP 0.15 all Cats visibility to 1½ SM. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALS-F-2

A

MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct PEPBI and hold.

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 EAST 124.35 316.15 WEST	HOUSTON TOWER 120.72 290.2	GND CON 121.7	CLNC DEL 128.1	CPDLC
------------------	--	-------------------------------	------------------	-------------------	-------

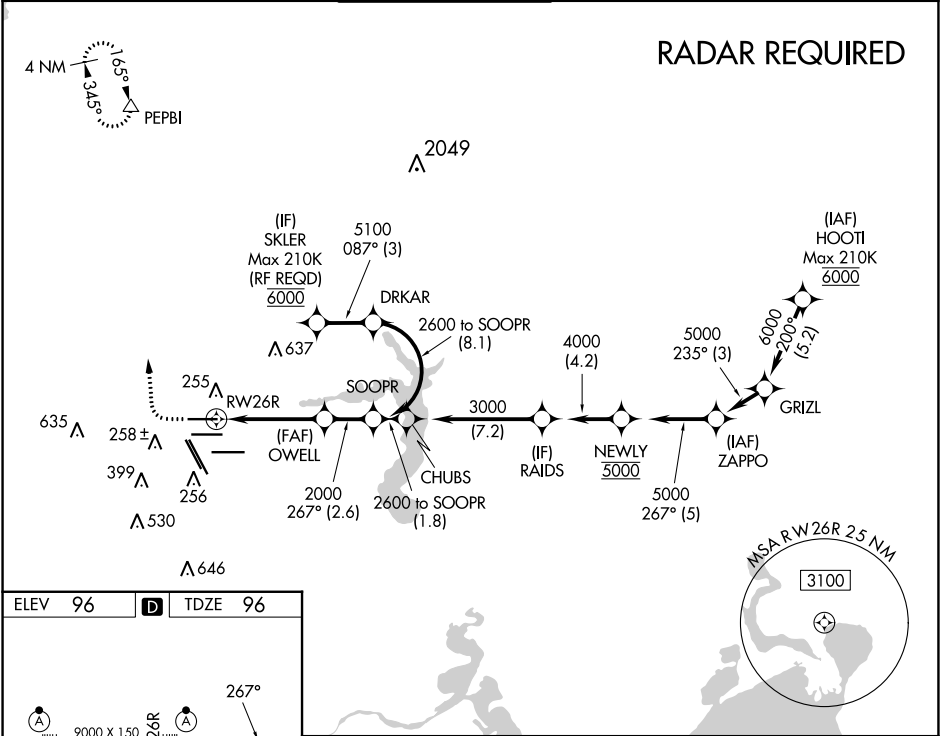

CATEGORY	A	B	C	D
RNP 0.11 DA		429/40	333 (400-¾)	
RNP 0.15 DA		496/45	400 (400-⅞)	
RNP 0.30 DA		554/50	458 (500-1½)	
AUTHORIZATION REQUIRED				

TDZ/CL Rwy's 8R, 8L, 15R, 26R, 26L, 27 and 33L
HIRL all Rwy's