


WAAS CH <b>87115</b> <b>W05A</b>	APP CRS <b>053°</b>	Rwy Idg TDZE Apt Elev <b>6215</b> <b>947</b> <b>947</b>
--	------------------------	--

RNAV (GPS) Y RWY 5

WEST VIRGINIA INTL YEAGER (CRW)

RNP APCH.		MISSED APPROACH: Climb to 3000 direct ENIVY and hold.
For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C.		

ATIS <b>127.6</b>	CHARLESTON APP CON <b>124.1 269.125</b>	CHARLESTON TOWER <b>125.7 257.8</b>	GND CON <b>121.8 348.6</b>	CLNC DEL <b>118.55</b>
----------------------	--	--	-------------------------------	---------------------------

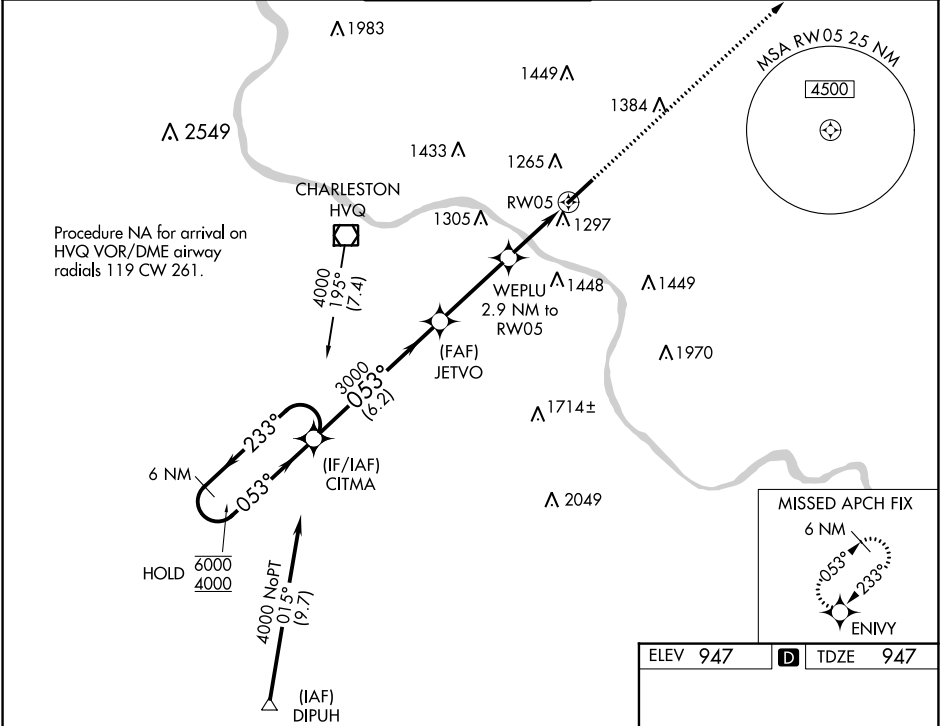

6 NM Holding Pattern CITMA		3000 ENIVY	
6000 ← 233° 4000 → 053°		* LNAV only	
GP 3.00° TCH 56		* 1.7 NM to RW05	
6.2 NM		1.2 NM	
CATEGORY	A	B	C
LPV DA	1147/40		200 (200-¾)
LNAV/VNAV DA	1584-1¾		637 (700-1¾)
LNAV MDA	1560/55	613 (700-1)	1560-1¾ 613 (700-1¾)
CIRCLING	1600-1	653 (700-1)	1760-2½ 813 (900-2½) 1880-3 933 (1000-3)

