

WAAS CH 90203 W13A	APP CRS 130°	Rwy Idg 4408 TDZE 2032 Apt Elev 2034
--	------------------------	---

RNAV (GPS) RWY 13

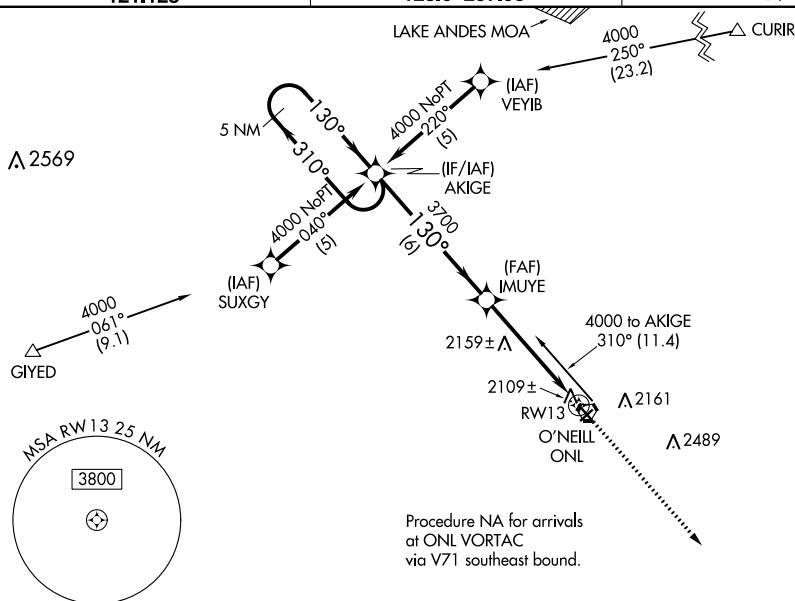
THE O'NEILL MUNI-JOHN L BAKER FLD (ONL)

Baro-VNAV NA when using Evelyn Sharp Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (+2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Evelyn Sharp Fld altimeter setting and increase LPV DA to 2433 feet, LNAV/VNAV DA to 2505 feet; increase all MDAs 140 feet and visibility Cat C ½ SM. VDP NA when using Evelyn Sharp Fld altimeter setting. Next landing: Rwy 4, 22 NA.

MISSED APPROACH:
Climb to 4000 direct
AFSIC and hold.


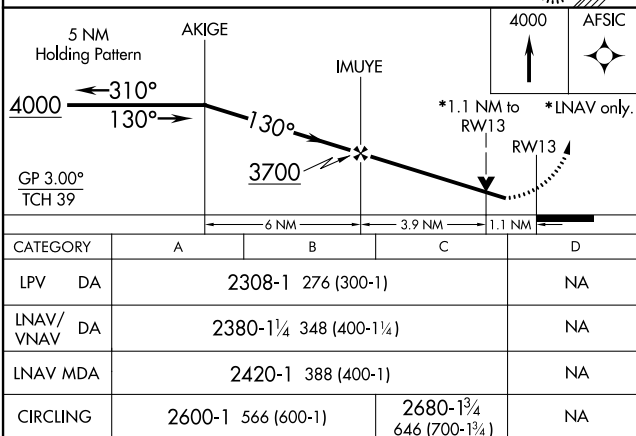
AWOS-3
121.125

MINNEAPOLIS CENTER
128.0 257.95

UNICOM
122.8 (CTAF) **L**

Procedure NA for arrivals
at ONL VORTAC
via V71 southeast bound.

ELEV 2034		TDZE 2032
-----------	--	-----------

REIL Rwy 13 and 31 **L**MIRL Rwy 13-31 **L**

O'NEILL, NEBRASKA

Amdt 1C 07OCT21

THE O'NEILL MUNI-JOHN L BAKER FLD (ONL)

42°28'N-98°41'W

RNAV (GPS) RWY 13