

WAAST
CH **78001**
W**32A**

APP CRS
317°

Rwy Idg
TDZE **102**
Apt Elev **107**

RNAV (GPS) RWY 32

MC ALLEN INTL (MFE)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). Circling NA northeast of Rwy 14-32. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Weslaco altimeter setting: increase all DA 39 feet and LNAV/VNAV all Cat visibility ¼ mile; increase all MDA 40 feet and LNAV Cat C/D visibility ½ mile. Baro-VNAV and VDP NA when using Weslaco altimeter setting.

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct SANCA and hold.

ATIS 128.5	VALLEY APP CON 121.0 377.2	MC ALLEN TOWER * 118.5 (CTAF) 0 256.9	GND CON 121.8	UNICOM 122.95
----------------------	--------------------------------------	---	-------------------------	-------------------------

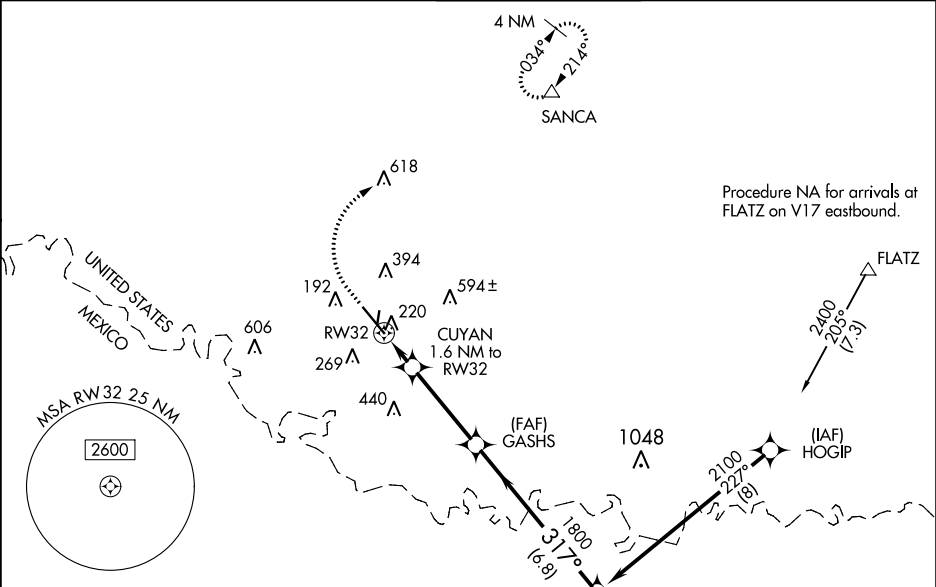

ELEV 107	D	TDZE 102
----------	----------	----------

800

2000

SANCA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 53).

*LNAV only

GASHS

FOVUD

CUYAN

1.6 NM to RW32

RW32

*1 NM to RW32

1800

2100

GP 3.00°

TCH 50

	1 NM	0.6	3.6 NM	6.8 NM	
CATEGORY	A	B	C	D	
LPV DA	302-¾				200 (200-¾)
LNAV/VNAV DA	391-⅞				289 (300-⅞)
LNAV MDA	480-1				378 (400-1)
C CIRCLING	580-1	473 (500-1)	580-1½ 473 (500-1½)	800-2¼ 693 (700-2¼)	

REIL Rwy 32
HIRL Rwy 14-32 **1**
MIRL Rwy 18-36 **1**