

WAAS CH 63232 W28A	APP CRS 279°	Rwy Idg TDZE 1162 Apt Elev 1182	5005
--	------------------------	---	-------------

RNAV (GPS) RWY 28

MOUNTAIN VIEW (MNT)

RNP APCH - GPS.

▼

NA

Procedure NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA. Use West Plains altimeter setting; when not received, use Fort Leonard Wood altimeter setting and increase all MDA 80 feet; increase LP Cats C and D visibility ¼ SM, increase LNAV Cats C and D ⅛ SM and Circling Cats B and C visibility ¼ SM.

MISSED APPROACH:
Climb to 3700 direct ZOLAK and hold.

UNO ASOS 123.825	KANSAS CITY CENTER 128.35 284.675	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

MISSED APCH FIX

099°

279°

ZOLAK

4 NM

000°

189°

TIYUR

30 NM to TIYUR

3700


000°

189°


TIYUR

30 NM to TIYUR (NoPT)

3700

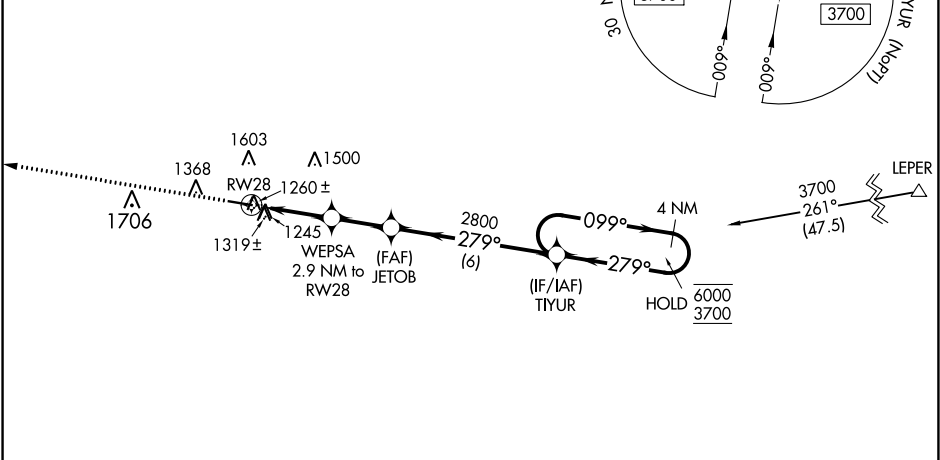

ELEV 1182	TDZE 1162
------------------	------------------

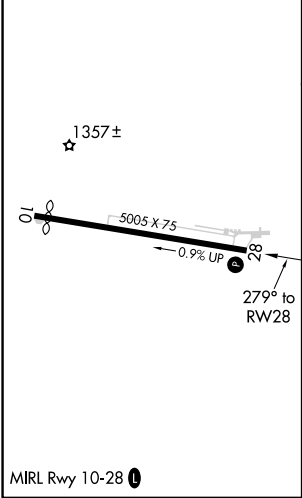

3700	ZOLAK	Visual Segment - Obstacles.			
		WEPSA 2.9 NM to RW28	JETOB	TIYUR	4 NM Holding Pattern
		2100	2800	279°	099° → 6000 ← 279° 3700
		2.9 NM	2.2 NM	6 NM	
CATEGORY	A	B	C	D	
LP MDA	1560-1	398 (400-1)	1560-1⅓	398 (400-1⅓)	
LNAV MDA	1620-1	458 (500-1)	1620-1⅓	458 (500-1⅓)	
CIRCLING	1880-1 698 (700-1)	2080-1¼ 898 (900-1¼)	2080-2¾ 898 (900-2¾)	2180-3 998 (1000-3)	