

APP CRS
313°

Rwy Idg	8000
TDZE	476
Apt Elev	487

RNAV (RNP) Z RWY 31L
DALLAS LOVE FLD (DAL)

▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 48°C (119°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop MALS, increase RNP 0.30 visibility all Cats to 2½ miles.

MALSR

MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 direct TADDI and hold.

D-ATIS
120.15


REGIONAL APP CON		
NORTH	124.3	282.275
SOUTH	125.2	343.65

LOVE TOWER
123.7 239.3

GND CON
121.75 348.6


CLNC DE
127-9

CPDLC

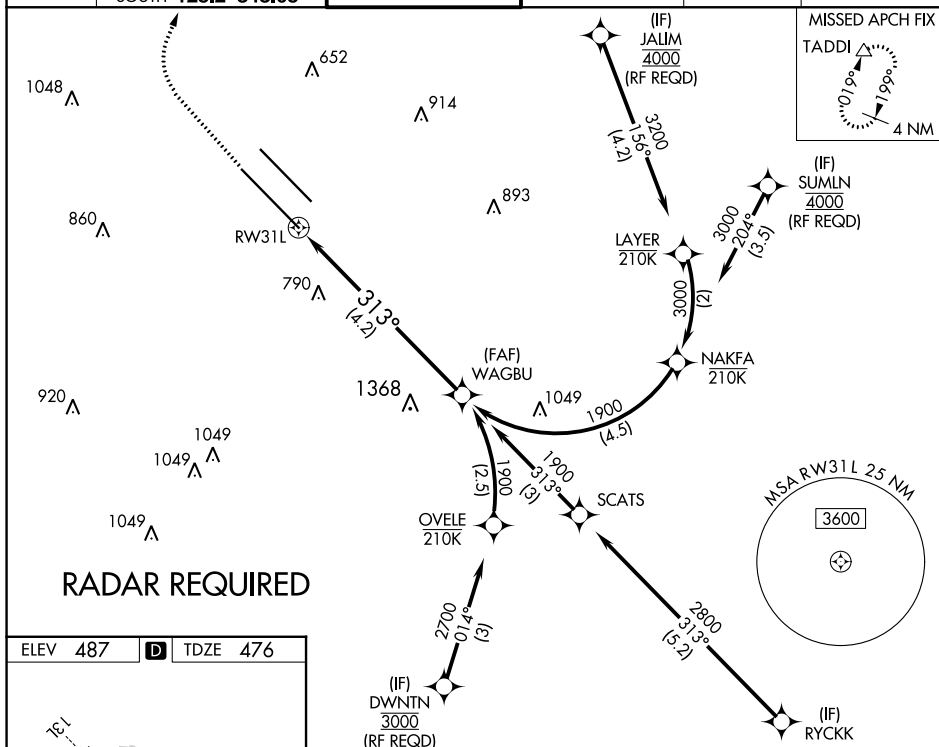

ELEV 487

D TDZE 476

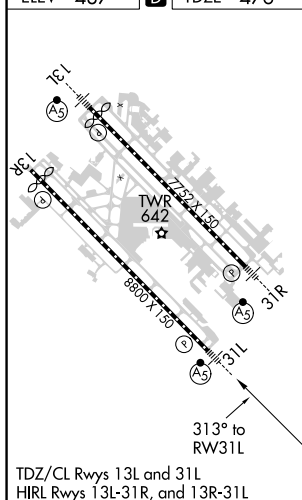

1700	4000	TADDI	See planview for multiple IF locations.
------	------	-------	---

