

WAAS CH <b>58010</b> <b>W23A</b>	APP CRS <b>231°</b>	Rwy Idg <b>5572</b> TDZE <b>471</b> Apt Elev <b>480</b>
--	------------------------	---

RNAV (GPS) RWY 23

MOUNT VERNON (MVN)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C (5°F) or above 48° C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Centralia altimeter setting: increase LPV DA to 766 feet; increase LNAV VNAV DA to 918 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D and Circling Cat C ¼ SM. For inop MALS, when using Centralia altimeter setting, increase LPV all Cats visibility to 1 mile. VDP and Baro-VNAV NA when using Centralia altimeter setting. Circling to Rwy 15/33 NA at night.



MALS

A5

⋮

MISSED APPROACH:  
Climb to 3000 direct  
GEJTO and hold.

AWOS-3PT <b>118.2</b>	KANSAS CITY CENTER <b>127.7 351.825</b>	UNICOM <b>123.0(CTAF) 0</b>
--------------------------	--	--------------------------------

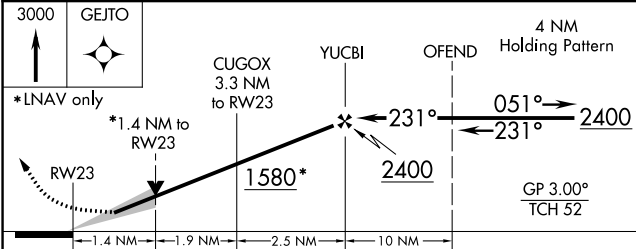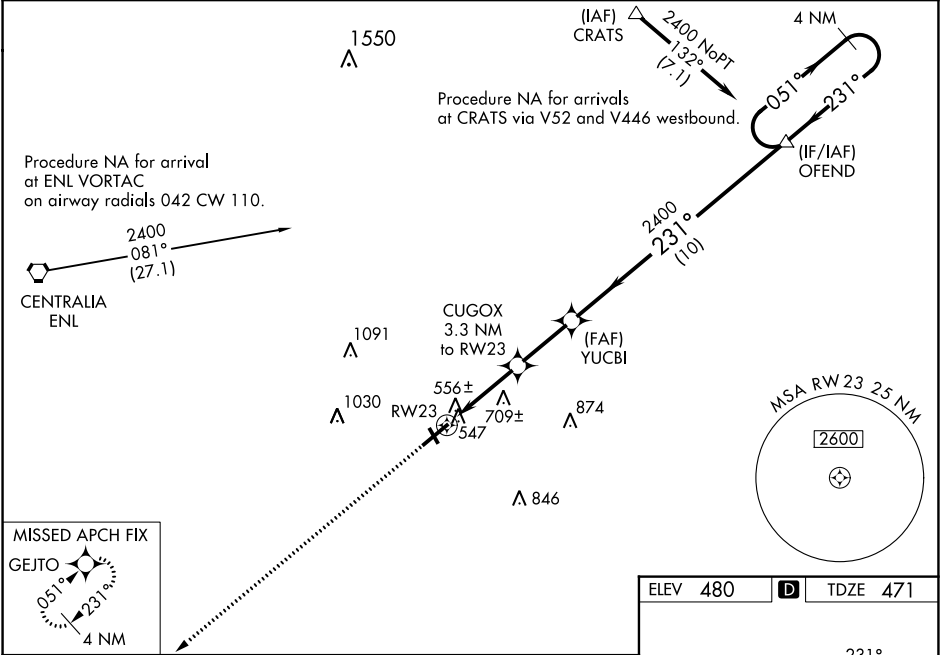

CATEGORY	A	B	C	D
LPV DA	721-½		250 (300-½)	
LNAV/VNAV DA	873-1		402 (400-1)	
LNAV MDA	960-½	489 (500-½)	960-¾ 489 (500-¾)	960-1 489 (500-1)
CIRCLING	1000-1	520 (600-1)	1140-1¾ 660 (700-1¾)	1380-3 900 (900-3)

