

|  |                        |   |             |
|--|------------------------|---|-------------|
| WAAS<br>CH <b>97737</b><br><b>W07A</b> | APP CRS<br><b>068°</b> | Rwy Idg<br>TDZE <b>966</b><br>Apt Elev <b>966</b> | <b>3900</b> |
|--|------------------------|---|-------------|

RNAV (GPS) RWY 7


BLOYER FLD (Y72)

NA


DME/DME RNP-0.3 NA. Use Camp Douglas altimeter setting; when not received, use Sparta/Fort McCoy altimeter setting and increase all MDA 20 feet, increase LNAV Cat C visibility 1/8 mile. Helicopter visibility reduction below 1 SM NA. Procedure NA at night.

MISSED APPROACH:  
Climb to 3000 direct  
GLAKE and hold.

|   |                           |                        |
|---|---------------------------|------------------------|
| VOLK APP CON ★<br><b>135.25 244.875</b> | VOLK CTAF<br><b>127.5</b> | CTAF<br><b>122.9</b> 0 |
|---|---------------------------|------------------------|

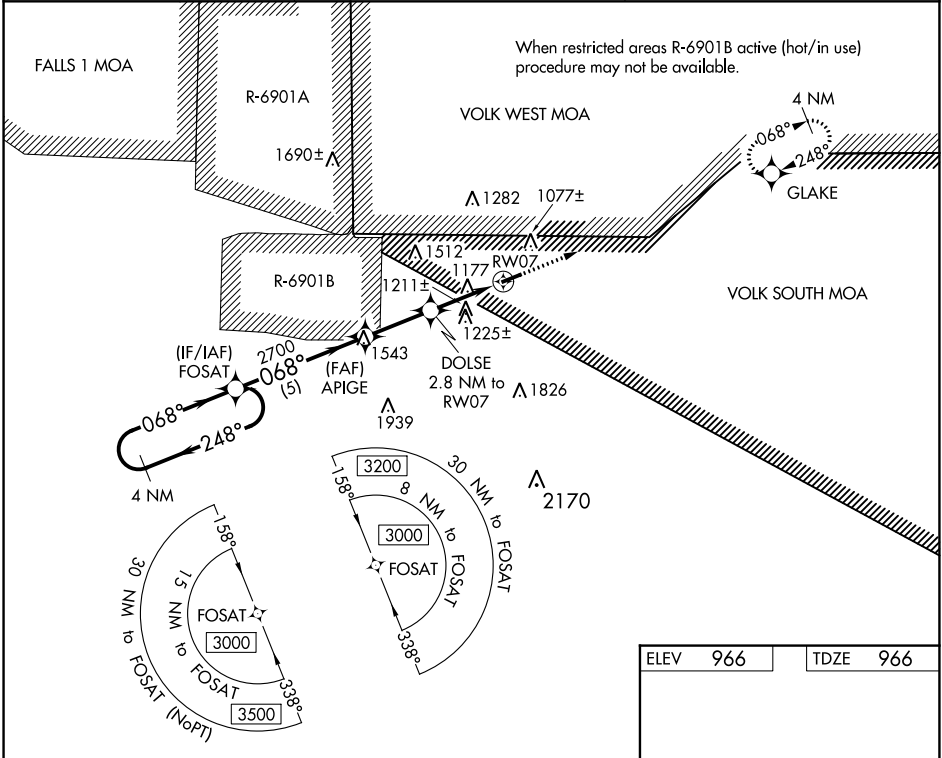

|          |          |
|----------|----------|
| ELEV 966 | TDZE 966 |
|----------|----------|

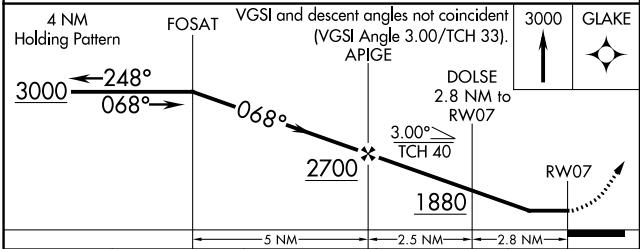

| CATEGORY | A                     | B                     | C                             | D  |
|----------|-----------------------|-----------------------|-------------------------------|----|
| LP MDA   | 1460-1                | 494 (500-1)           | 1460-1 3/8<br>494 (500-1 3/8) | NA |
| LNAV MDA | 1500-1                | 534 (600-1)           | 1500-1 1/2<br>534 (600-1 1/2) | NA |
| CIRCLING | 1540-1<br>574 (600-1) | 1560-1<br>594 (600-1) | 1660-2<br>694 (700-2)         | NA |

