

WAAS  
CH **78300**


APP CRS  
**269°**

Rwy Idg **5000**  
TDZE **910**  
Apt Elev **912**

**RNAV (GPS) RWY 27**

ANOKA COUNTY/BLAINE (JANES FLD) (A.N.E.)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Crystal altimeter setting: increase LPV DA to 1131 feet; increase LNAV/VNAV DA to 1361 feet and all visibilities ¼ SM, increase all MDA 40 feet and visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM. Baro-VNAV and VDP NA when using Crystal altimeter setting. For inop ALS when using Crystal altimeter setting, increase LNAV Cat C/D visibility to 1 ¾ SM.					MALSR A5	MISSED APPROACH: Climb to 2700 direct GEP VORTAC and hold, continue climb-in-hold to 2700.
ATIS <b>120.625</b>	MINNEAPOLIS APP CON <b>126.5 335.65</b>	ANOKA TOWER★ <b>132.4</b> (CTAF) 0	GND CON <b>121.85</b>	CLNC DEL <b>121.3</b>	CLNC DEL <b>121.85</b> (When twr closed)	UNICOM <b>122.95</b>

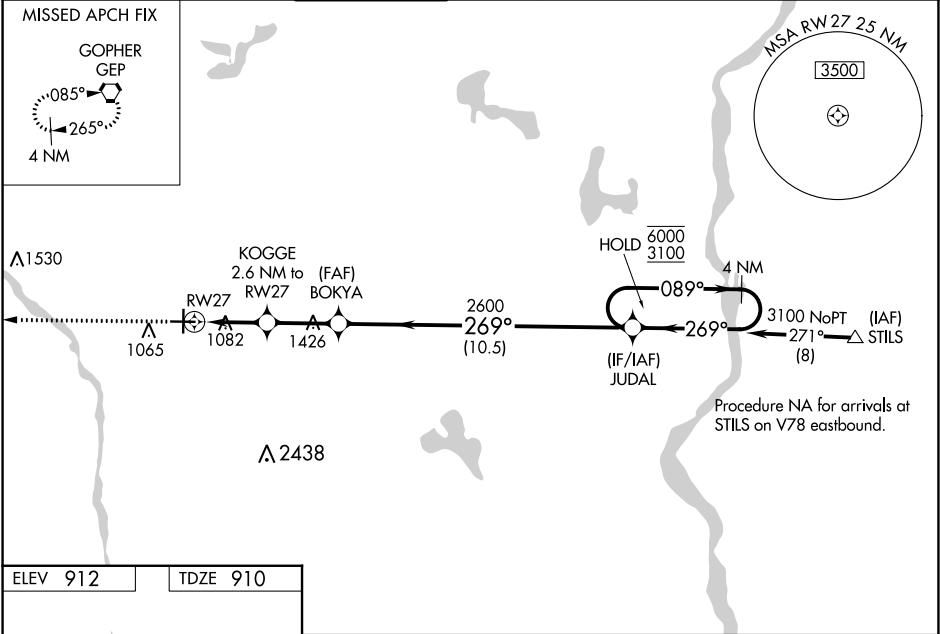

ELEV 912

TDZE 910

2700 GEP

KOGGE 2.6 NM to RW27

BOKYA 2600

JUDAL 4 NM Holding Pattern

089° 269° 269° 089°

6000 3100

GP 3.00° TCH 49

CATEGORY	A	B	C	D
LPV DA	1110-½ 200 (200-½)			
LNAV/VNAV DA	1340-¾ 430 (500-¾)			
LNAV MDA	1340-½	430 (500-½)	1340-¾	430 (500-¾)
CIRCLING	1400-1	488 (500-1)	1420-1½ 508 (600-1½)	1580-2 668 (700-2)