

22363

RNAV (GPS) RWY 20
DANVILLE RGNL (DAN)

V Baro-VNAV NA when using Roxboro, NC altimeter setting. For uncompensated
A Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When
local altimeter setting not received, use Roxboro, NC altimeter setting and increase
all DA 62 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility
¼ mile and LNAV Cats C and D ¼ mile. VDP NA with Roxboro, NC altimeter setting.

MISSED APPROACH: Climb to 2500 direct LANTA and hold.


UNICOM
123.05 (CTAF) **L**



HIRL Rwy 2-20

MRL Rwy 13-31

REIL Rwy 13, 20 and 31

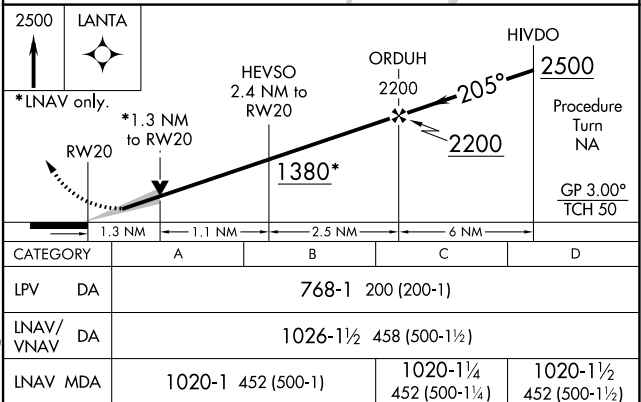

DANVILLE RGNL (DAN)
RNAV (GPS) RWY 20

NE-3, 13 JUL 2023 to 10 AUG 2023