

WAAS
CH **45800**
W16A

APP CRS
163°

Rwy Idg
TDZE **1202**
Apt Elev **1204**

RNAV (GPS) RWY 16

PLATTSMOUTH MUNI/DOUGLAS V DUEY FLD (PMV)

⚠



When local altimeter setting not received, use Offutt AFB altimeter setting, increase all DAs 45 feet and all MDAs 60 feet, increase LNAV/VNAV all Cats visibility ¼ mile. VDP NA when using Offutt AFB altimeter setting. Baro-VNAV NA when using Offutt AFB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2800 direct AVFAL and hold.

AWOS-3
118.975

OMAHA APP CON
120.1 354.05

UNICOM
122.7 (CTAF) 

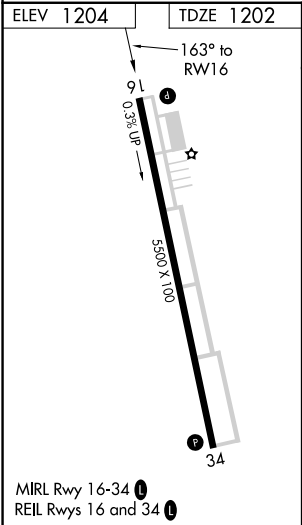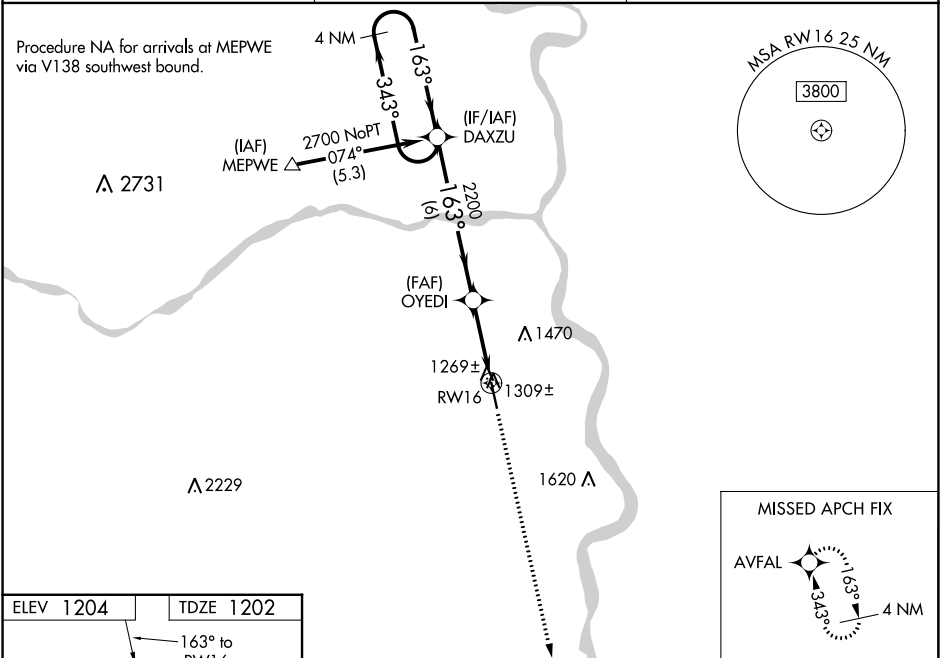

<div>4 NM Holding Pattern</div>				<div>DAXZU</div>		<div>2800</div> <div>↑</div>		<div>AVFAL</div> <div>✦</div>	
<div>2700</div>				<div>← 343°</div>		<div>163° →</div>		<div>* LNAV only.</div>	
<div>GP 3.00°</div>				<div>163°</div>		<div>2200</div>		<div>* 1 NM to RW16</div>	
<div>TCH 39</div>				<div>6 NM</div>		<div>2 NM</div>		<div>1 NM</div>	
CATEGORY		A	B		C		D		
LPV	DA	1452-1 250 (300-1)				NA			
LNAV/VNAV	DA	1539-1¼ 337 (400-1¼)				NA			
LNAV	MDA	1560-1 358 (400-1)				NA			
CIRCLING		1640-1 436 (500-1)	1660-1 456 (500-1)				NA		