

WAAS CH 53303 W26A	APP CRS 263°	Rwy Idg TDZE Apt Elev	5102 3254 3279
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 26
SEARLE FLD (OGA)

RNP APCH


T When local altimeter setting not received, use Imperial altimeter setting and increase **all** DA 86 feet and **all** MDA 100 feet, increase LPV **all** Cots visibility $\frac{1}{8}$ SM, LNAV/VNAV **all** Cots and Circling Cat B visibility $\frac{1}{4}$ SM. VDP and Baro-VNAV NA when using Imperial altimeter setting. For unserviceable Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.

MISSED APPROACH:
Climb to 5300 direct
AHUFU and hold.

AWOS-3 121.275	DENVER CENTER 132.7 397.85	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	--

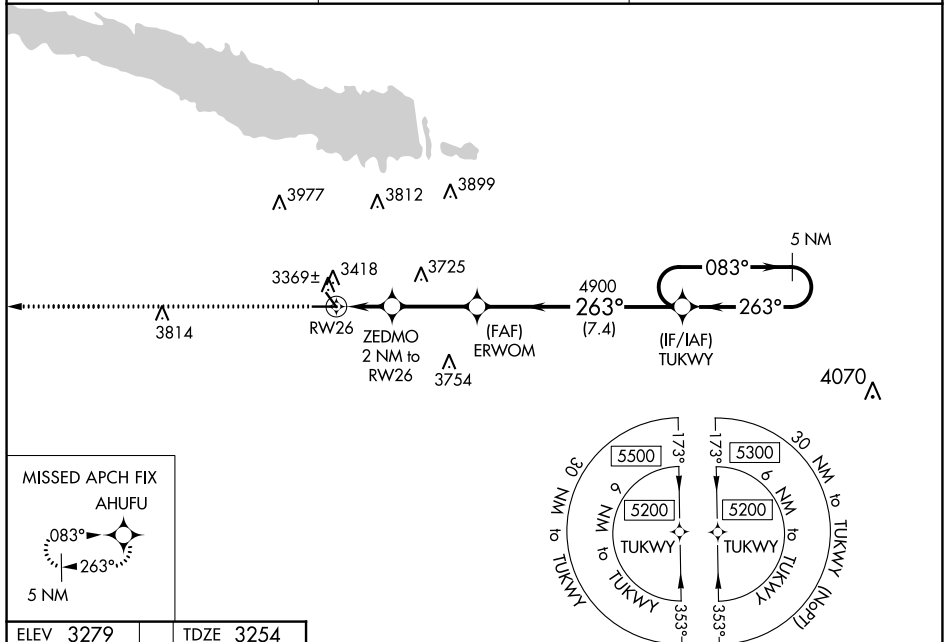

ELEV 3279	TDZE 3254
-----------	-----------

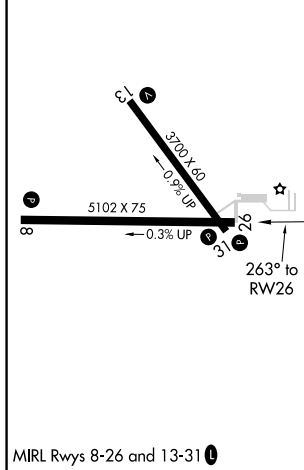

<div><div><div>5300</div><div>↑</div></div><div><div>AHUFU</div><div>✧</div></div></div> <div><div><div>ZEDMO</div><div>2 NM to RW26</div></div><div><div>ERWOM</div><div>4900</div></div><div><div>TUKWY</div><div>5 NM Holding Pattern</div></div></div> <div><div><div>*1 NM to RW26</div><div>↓</div></div><div><div>263°</div></div><div><div>083° →</div><div>← 263°</div></div><div><div>5200</div></div><div><div>GP 3.00°</div><div>TCH 48</div></div></div> <div><div><div>1 NM</div><div>1 NM</div><div>3.1 NM</div><div>7.4 NM</div></div><div><div>3900*</div><div>4900</div></div></div>					
CATEGORY	A		B	C	D
LPV DA	3504-1	250 (300-1)		NA	
LNAV/VNAV	3540-1	286 (300-1)		NA	
LNAV MDA	3620-1	366 (400-1)		NA	
CIRCLING	3940-1 661 (700-1)	4000-1 721 (800-1)		NA	